

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of:

Michael John David Taylor

Application. No.: TBD

Filed: September 30, 2003

Title: HIERARCHICAL DATA EXTRACTION

:  
:  
:  
:  
:  
:  
:

Group Art Unit: TBD

Examiner: TBD

**CLAIM FOR PRIORITY**


Commissioner for Patents  
P.O. Box 1450  
Alexandria, Virginia 22313-1450

Sir:

A certified copy of corresponding Great Britain Application No. 0312324.7, filed May 29, 2003 is attached. It is requested that the right of priority provided by 35 U.S.C. 119 be extended by the U.S. Patent and Trademark Office.

Respectfully submitted,

Date: September 30, 2003



Michael A. Schwartz, Reg. No. 40,161  
Swidler Berlin Shereff Friedman, LLP  
3000 K Street, NW, Suite 300  
Washington, DC 20007-5116  
Telephone: (202) 424-7500  
Facsimile: (202) 295-8478





INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 20 June 2003

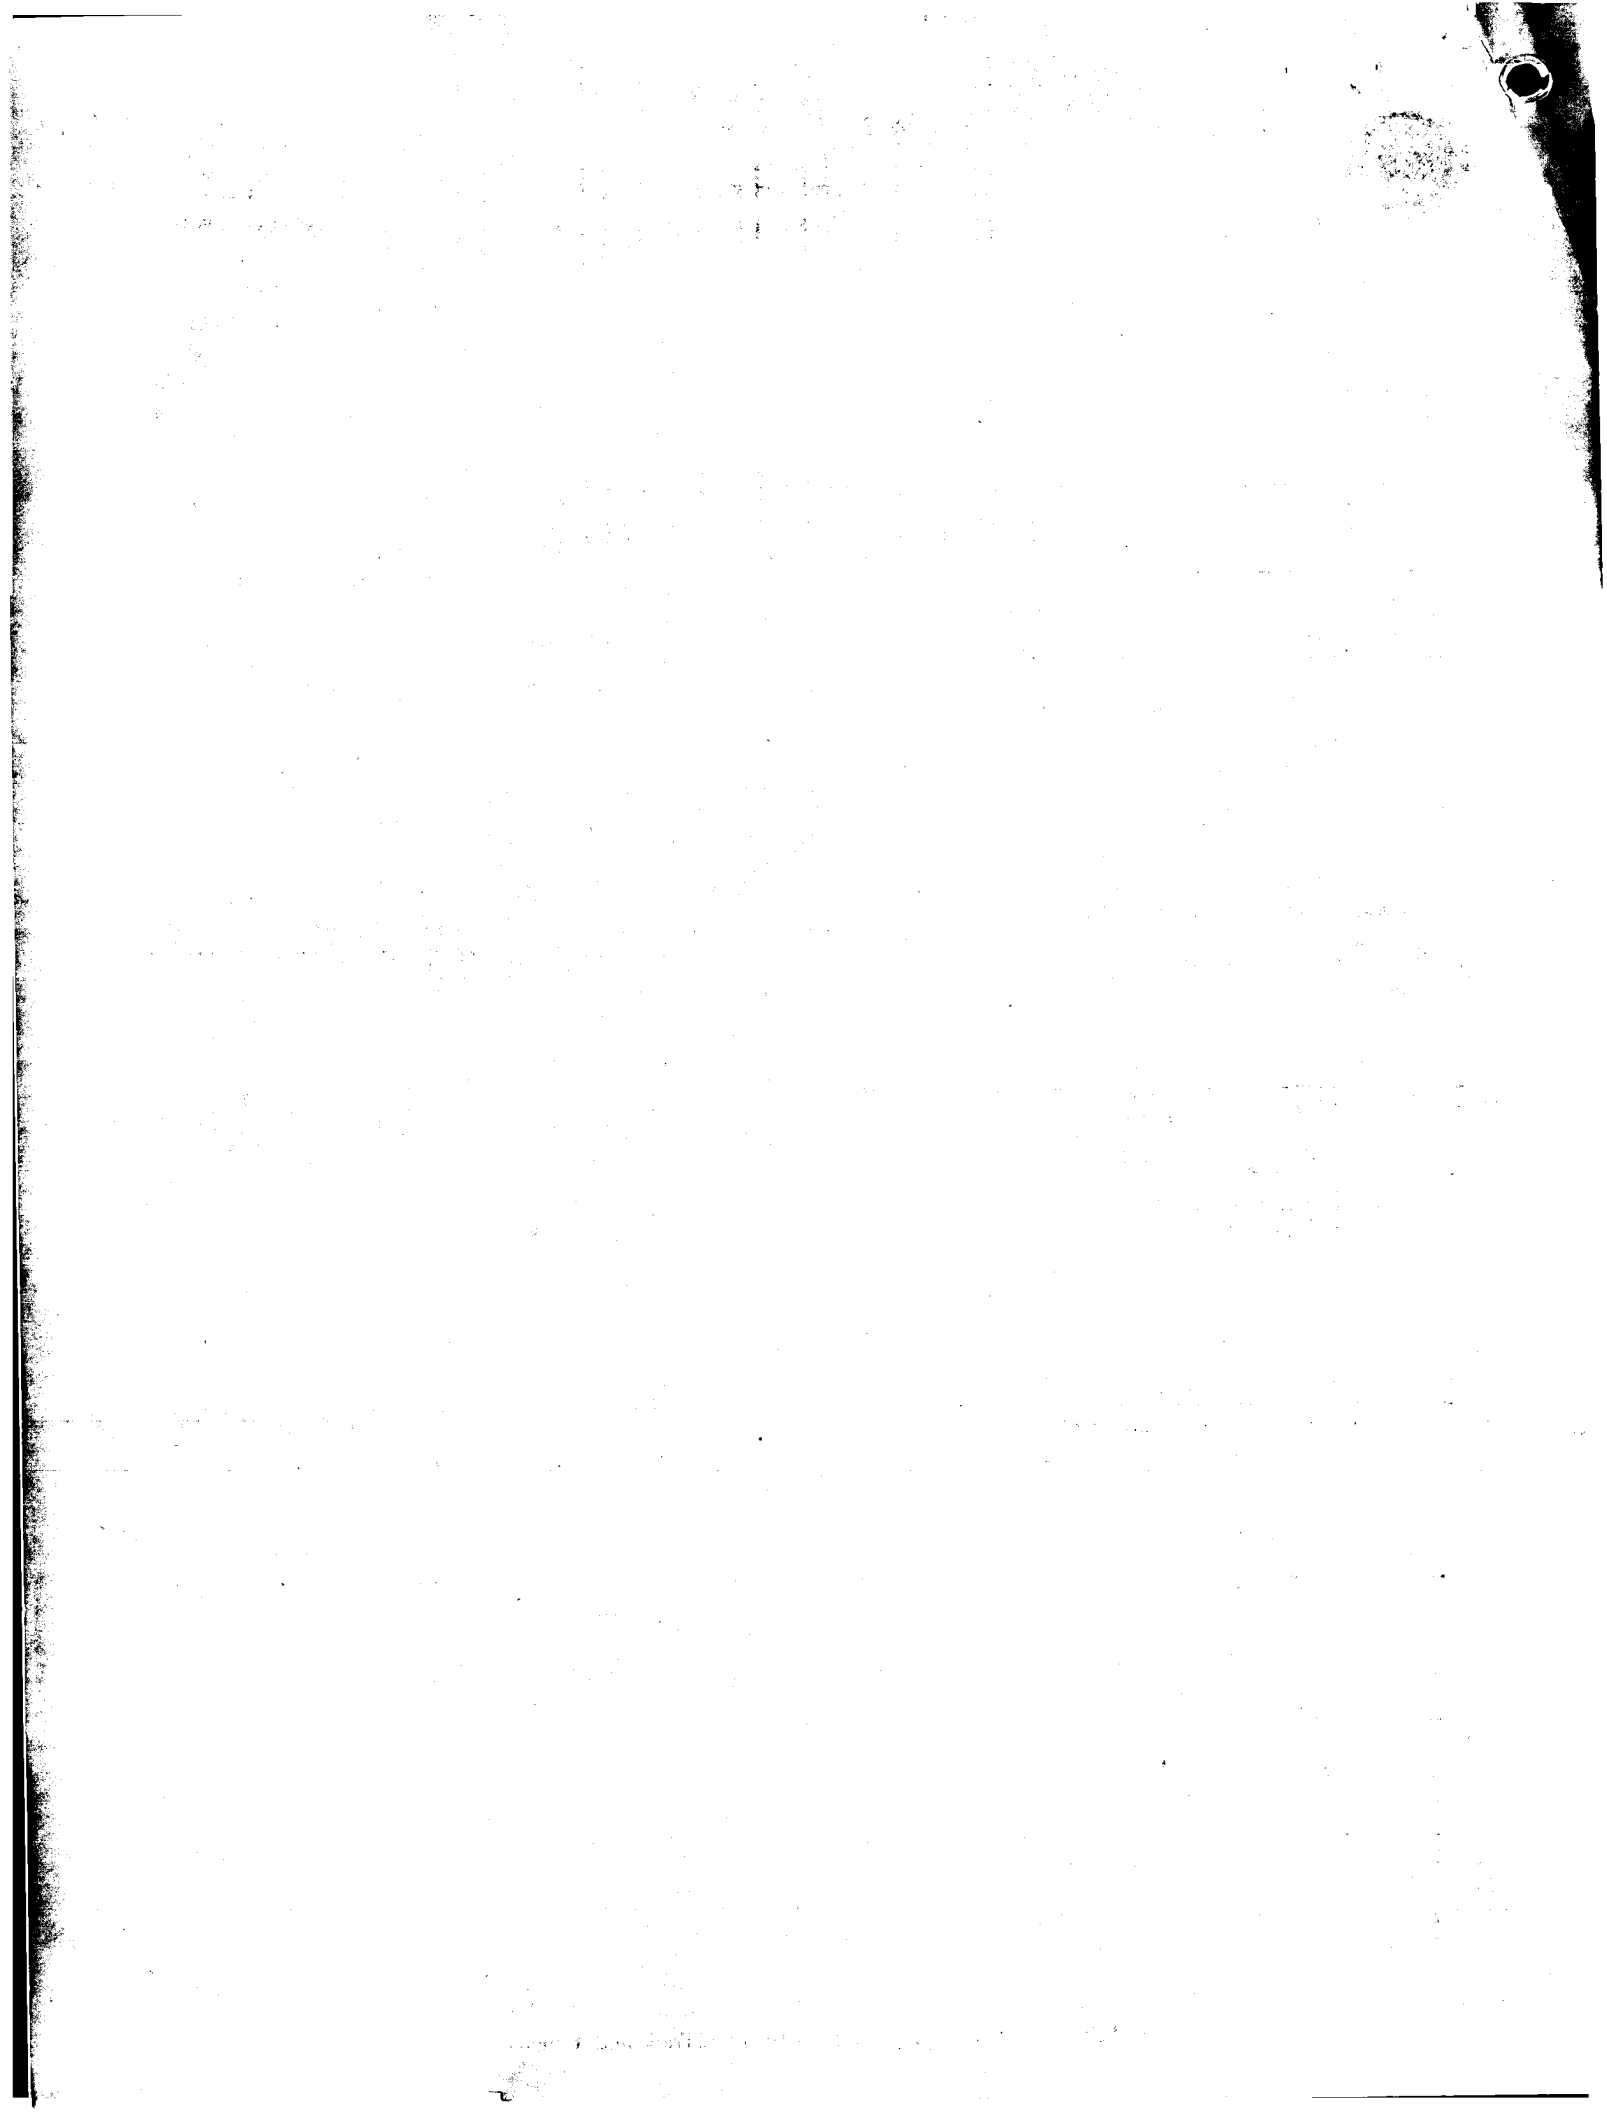

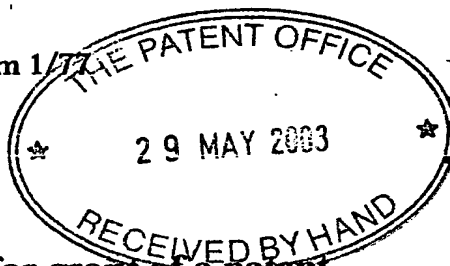The  
Patent  
Office30MAY03 ES 1040-5 002890  
P01/7700 000-03 2324.7**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference	RSJ07766GB		
2. Patent application number <i>(The Patent Office will fill in this part)</i>	0312324.7		
3. Full name, address and postcode of the or of each applicant <i>(underline all surnames)</i>	Oracle International Corporation 500 Oracle Parkway M/S 50p7 Redwood Shores California 94065 USA		
Patents ADP number <i>(if you know it)</i>	USA		
If the applicant is a corporate body, give the country/state of its incorporation	Delaware		
4. Title of the invention	HIERARCHICAL DATA EXTRACTION		
5. Name of your agent <i>(if you have one)</i>	Gill Jennings & Every		
"Address for service" in the United Kingdom to which all correspondence should be sent <i>(including the postcode)</i>	Broadgate House 7 Eldon Street London EC2M 7LH		
Patents ADP number <i>(if you know it)</i>	745002 ✓		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and <i>(if you know it)</i> the or each application number	Country	Priority application number <i>(if you know it)</i>	Date of filing <i>(day / month / year)</i>
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing <i>(day / month / year)</i>
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? <i>(Answer 'Yes' if:</i> a) <i>any applicant named in part 3 is not an inventor, or</i> b) <i>there is an inventor who is not named as an applicant, or</i> c) <i>any named applicant is a corporate body.</i> <i>See note (d))</i>	YES		

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	30
Claim(s)	3
Abstract	1
Drawing(s)	9 + 9

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1 ✓

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77) 1 ✓

Any other documents (please specify) NO

11. For the applicant  
Gill Jennings & Every

I/We request the grant of a patent on the basis of this application.

Signature



Date

29 May 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

SKONE JAMES, Robert Edmund


020 7377 1377

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes




- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

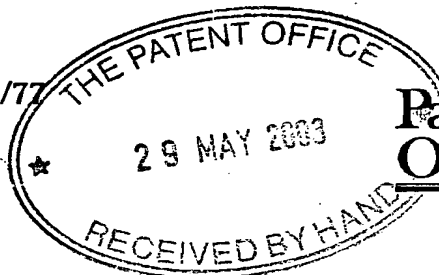

**Statement of inventorship and of  
right to grant of a patent**

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference	RSJ07766GB				
2. Patent application number (if you know it)	0312324.7				
3. Full name of the or of each applicant	Oracle International Corporation				
4. Title of the invention	HIERARCHICAL DATA EXTRACTION				
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent	By employment.				
6. How many, if any, additional Patents Forms 7/77 are attached to this form? (see note (c))					
7. For the applicant Gill Jennings & Every	<p>I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.</p> <table border="0" style="width: 100%;"> <tr> <td style="text-align: right;">Signature</td> <td style="text-align: right;">Date</td> </tr> <tr> <td style="text-align: right;"></td> <td style="text-align: right;">29 May 2003</td> </tr> </table>	Signature	Date		29 May 2003
Signature	Date				
	29 May 2003				
8. Name and daytime telephone number of person to contact in the United Kingdom	SKONE JAMES, Robert Edmund 020 7377 1377				

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

**Patents Form 7/77**

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Michael John David TAYLOR  
90 Langland House  
Broadway  
Chilton Polden  
Bridgwater  
Somerset  
United Kingdom

Patents ADP number (if you know it):

8640989001

Patents ADP number (if you know it):

**Reminder**

**Have you signed the form?**

Patents ADP number (if you know it):



HIERARCHICAL DATA EXTRACTION

This invention relates to the extraction of hierarchical data from a database and, in particular, to the automatic generation of structured query language (SQL) code to achieve this.

Data are extracted from databases typically in one of two ways. The first way involves constructing a query, such as an SQL statement, to present to the database for execution. The query identifies to the database which data are required for extraction.

The second method involves using a query tool such as Oracle Discoverer which, in simple terms, represents a graphical user interface between the user and the database. The query tool receives user input in a simplified format and generates the query, for example in SQL, to present to the database and then presents the retrieved data to the user.

A problem exists with both these methods when they are used to extract hierarchical data from a database since it is extremely complicated for a user to generate the required SQL code to extract the data and query tools are unable to generate the special SQL statements required.

In accordance with one aspect of the present invention there is provided a computer implemented method for extracting hierarchical data from one or more tables in a database, the method comprising:

- a. receiving user input identifying, at least, one or more tables in the database that contain the hierarchical data and the hierarchical structure of the hierarchical data;
- b. generating a Structured Query Language (SQL) statement using the user input received in step (a);
- c. presenting the SQL statement to the database for execution; and,

- d. extracting the hierarchical data from the database in response to the execution of the SQL statement.

Hence, the invention provides a method for  
5 automatically generating the complex SQL required to extract hierarchical data from a database. The complexity involved is hidden from the user who in fact requires no knowledge of SQL in order to use the invention.

Typically, the user input identifying the hierarchical  
10 structure indicates at least a column of one of the database tables that represents the parent items of the hierarchical structure and a column of one of the database tables that represents the child items of the hierarchical structure.

15 In this case, the data value that is the top of the hierarchical structure may have a default value of NULL. Alternatively, the user input identifying the hierarchical structure may indicate the data value in the column representing the parent items that is the top of the  
20 hierarchical structure.

The user input identifying the hierarchical structure may also indicate at least one further column of one of the tables that further restricts the hierarchy.

The method may also be used to perform aggregation of  
25 values associated with the hierarchy. As such, prior to generating the SQL statement, further user input may be received, the user input indicating at least one column of one of the database tables on which leaf sum aggregation should be performed.

30 Alternatively, or in addition, prior to generating the SQL statement, further user input may be received, the user input indicating at least one column of one of the database tables on which tree sum aggregation should be performed.

In a preferred embodiment, the SQL statement is  
35 generated from the user input by:

- i. constructing object SQL that will return all the database items identified by the user input;
- 5 ii. constructing object SQL that calculates the level of an item in the hierarchical structure;
- iii. constructing object SQL that calculates the number of child items appendant to an item in the hierarchical structure; and,
- 10 iv. combining the object SQL of steps (i) to (iii) in a single object SQL statement.

When the SQL statement is generated from the user input in this way and leaf sum aggregation is to be performed, further object SQL that performs the leaf sum  
15 aggregation may be constructed and this further object SQL may be combined with the object SQL of steps (i) to (iii) in step (iv).

Alternatively, or in addition, when the SQL statement is generated as described and tree sum aggregation is to be  
20 performed, further object SQL that performs the tree sum aggregation is constructed and this further object SQL is combined with the object SQL of steps (i) to (iii) in step (iv).

The invention will typically be provided as a computer  
25 program comprising computer program code means adapted to perform the steps of the first aspect of the invention when said program is run on a computer.

Further, there may be provided a computer program product comprising program code means stored on a computer  
30 readable medium for performing a method according to the first aspect of the invention when said program product is run on a computer.

Some embodiments of the invention will now be described with reference to the accompanying drawings, in  
35 which:

Figure 1 shows a table in a database defining a pig's ear hierarchy;

Figure 2 shows the hierarchical structure of the hierarchy defined by the table of Figure 1;

Figure 3 shows a pair of database tables defining a simple matrix hierarchy;

5        Figure 4 shows the contents of one of the tables defining the hierarchy of Figure 3;

Figure 5 indicates the structure according to the hierarchy of Figures 3 and 4;

10       Figure 6 shows a set of tables defining a complex matrix value hierarchy;

Figure 7 shows the contents of the ORG HIER table of Figure 5; and,

Figure 8 indicates the structure of the hierarchy according to Figures 6 and 7.

15       In order to describe the embodiments of the invention fully, it is worthwhile first describing two types of hierarchical structure with which the invention may be used. It is important to realise however, that the invention is not restricted for use with only these types  
20       of hierarchical structure and a skilled person will realise that its use can be extended to other structures.

Whilst the embodiments below are presented with reference to "tables", it will be understood that these can also be thought of as database "views".

25       Figure 1 shows a table designated EMP having eight columns under which data relating to the employees of a company are listed. Of particular interest are the columns EMPNO, ENAME and MGR. The values in the ENAME column are the names of the individual employees whilst the EMPNO and  
30       MGR columns gives their employee numbers and the employee numbers of their manager respectively.

Each row in the table has a unique value of EMPNO and a corresponding value of MGR. This value of MGR refers to another value of EMPNO since the EMPNO and MGR columns are  
35       joined. For example, the value of EMPNO for the employee named SMITH is 7369 and the corresponding MGR value is 7902. This MGR value corresponds to EMPNO value of 7902

which is that of the employee named FORD. In essence, this table defines the hierarchical structure of the company. Such a hierarchy is known as a pig's ear hierarchy and is characterised by a join from one column of a table to a different column of the same table. The main disadvantage of this kind of hierarchical structure is that the structure itself is mixed in with other data and so, supporting more than one hierarchy requires duplication of data.

The resultant structure described by this table is shown in Figure 2 in which it can be seen that the employee with an ENAME value of KING is the top of the hierarchy (with an MGR value of NULL). The employees with ENAME values of JONES, BLAKE and CLARK all have corresponding MGR values of 7839 and this corresponds to the EMPNO value of KING and so these three employees form the second level of the hierarchy as shown in Figure 2. Subsequent levels of the hierarchy are built up in the same manner.

The second type of hierarchical structure that will be described is a matrix hierarchy. This overcomes the disadvantage of pig's ear hierarchies since the hierarchy data is separated from the other data in its own hierarchy table. This allows for an unlimited number of hierarchical structures to be created on the same data therefore enabling, amongst other things, version control of hierarchies and complex data modelling.

An example of a matrix hierarchy is shown in Figure 3 which shows two tables named EMP and ORG. Only the columns that exist in each table are shown in Figure 3. The associated data are not shown. The table EMP is analogous to that shown in Figure 1 whilst the table ORG also has the columns EMPNO and MGR but has a second column known as ORGNAME. In this example, the EMPNO column of table EMP is joined to the corresponding EMPNO column of table ORG which has corresponding values. The corresponding values of MGR in table ORG are then joined back to the EMPNO column of table EMP. The third column ORGNAME stores the name of the

organisation and therefore allows for multiple hierarchies to be created, for example where the same employees may be working on different projects simultaneously then the ORGNAME column could refer to these different projects. An example of data that may be stored in this table ORG is shown in Figure 4 which shows two different organisations listed under the ORGNAME column with the names ORG A and ORG X. The values of EMPNO and the corresponding MGR values are listed next to these in order to define the hierarchies. The hierarchical structure according to this matrix example is shown in Figure 5.

A matrix hierarchy may be used for more complicated hierarchical structures than simple parent-child relationships as previously described. For example, Figure 6 shows a set of tables defining complex matrix hierarchy. In this example, the ORG HIER table is similar to the ORG table of Figure 3 but has three further columns ORGHIER\_ID, VER\_ID and BUS\_GRP\_NO. The ORGHIER\_ID column is a unique key for each row of this table. The VER\_ID column is joined to the corresponding column in a table known as HIER VERSION which has further columns known as VERSION NUMBER and STRUCT\_ID. This latter column is further joined to a corresponding column in a table known as HIER STRUCTURE which has a second column known as STRUCTURE NAME. The BUS\_GRP\_NO column of table ORG is joined to a corresponding column in a table BUSINESS GROUP. As such, hierarchies having multiple version numbers within multiple hierarchical structures and all within multiple business groups can be described. Further details of the ORG HIER table are provided in Figure 7 whereas the overall hierarchy according to this example is shown in Figure 8.

This invention is concerned with the extraction of hierarchical data from tables in a database that contain such data. The data required may simply be the level in the hierarchy which an item occupies or the number of subordinates that each item in the hierarchy has. Further, the invention can also perform aggregation functions.

In particular, the invention can calculate the tree some and leaf sum aggregates for a hierarchical structure. These aggregates are explained below by example.

Referring to Figure 2, the leaf sum and tree sum SAL  
5 aggregates for the employee called SMITH are 800. They  
equal the value of SAL for SMITH since he has no  
subordinates. SMITH reports to FORD for whom the leaf sum  
aggregate is also 800 being equal to the sum of the values  
in the SAL column for each of FORD's subordinates, in this  
10 case SMITH. The value of SAL for FORD is 3000 and  
therefore the tree sum aggregate of SAL for FORD is 3800.

FORD reports to JONES for whom the leaf sum aggregate  
of SAL is 1900 being equal to the sum of the values in the  
SAL column for each of JONES' immediate subordinates, FORD  
15 and SCOTT, only. The values in the SAL column for SMITH  
and ADAMS are relevant to the leaf sum aggregate of JONES.  
The tree sum aggregate for JONES is the sum of the values  
of the SAL column for JONES and all his subordinates.

In order to generate an SQL statement for extracting  
20 the data required, a user is first required to input  
various items to indicate, amongst other things, the table  
that holds the hierarchy data and the columns in the table  
that hold the parent and child identifiers, thereby  
identifying the hierarchical structure. The data may be  
25 input in various ways. For example, it may be input  
through a graphical user interface or alternatively, it may  
form the rows of a database table which are referred to by  
software performing the invention.

The entry of the user input and the subsequent  
30 construction of the SQL object for retrieving the  
hierarchical data will be described with reference to two  
examples. The first example, Example 1, is based on the  
simple pig's ear hierarchy of Figures 1 and 2 and the  
second example, Example 2, is based on the complex matrix  
35 hierarchy shown in Figure 6.

The first three user input items that must be received  
by the software for performing the invention are mandatory.

These items are respectively the name of the table that holds the hierarchy data (referred to as User Input 1), the name of a column on the table that holds the parent items (referred to as User Input 2) and a column on the table that holds the child items (referred to as User Input 3). If only these data items are input by the user then the software according to the invention will merely extract the level and number of subordinates for each parent item in the table.

The remaining items of user input are all optional. The first optional item is a start value that identifies the data value in the parent items that indicates the top of the hierarchy (referred to as User Input 4). This has a default value of NULL if no user assigned value is provided. The next user input item (referred to as User Input 5) is used to identify another column in the table that further restrict the hierarchy. If none exists then this item is not provided. Alternatively, the user can enter multiple columns for this user input item.

The next optional user input item (referred to as User Input 6) identifies the columns of the table or view that contain numerical values for which the user wishes to perform tree sum or leaf sum aggregation. If there are none then this item is not provided. Alternatively, the user may enter multiple columns for this item.

The final item (referred to as User Input 7) identifies the column that uniquely identifies the rows of the table that contains the child and parent items. For example, this may be the primary key. If there is no column on this table that does this then this item is not provided. In this case, the unique identifier for the row will be formed from a composite key consisting of the child item and the items of User Input referred to by User Input 5.

The table below shows for the purposes of Example 1 and Example 2 the values that are input for each of these user input items with respect to both examples:



User Input Item	Example 1	Example 2
User Input 1	EMP	ORG_HIER
User Input 2	MGR	MGR
User Input 3	EMPNO	EMPNO
User Input 4		0
User Input 5		VER_ID, BUS_GRP_NO
User Input 6	SAL, COMM	
User Input 7	EMPNO	ORGHIER_ID

10       The construction of the SQL object for extracting the level in the hierarchy for each item, the number of subordinates that it has and tree and leaf sum aggregation, if appropriate, can be broken down into the generation of the following distinct SQL segments.

15       Firstly, an initial SQL statement is constructed that selects the database items identified from the user input. This SQL object is then used in the creation of the other SQL segments.

20       The first SQL segment that is constructed is that which performs the aggregation of the user identified numerical data for leaf and tree sum aggregation.

      The next segment is object SQL that calculates the levels for each item in the data hierarchy.

25       The next segment is object SQL that calculates and extracts the number of subordinates for each item in the hierarchy.

      Object SQL is then generated that combines all of the above SQL segments into a single statement for execution on the database in order to extract the results required.

30       The combined SQL statement may be turned into a SQL object in the form of a database view. This is described later with reference to Example 2.

35       In order to construct the initial SQL statement referred to above, the users input (as shown in the above table) is taken and a basic SQL object is built from it. If no values exist for User Inputs 5 or 6 then they are

excluded from this SQL object. If more than one column has been provided for User Inputs 5 or 6 then they are all included in a comma separated format. If the value specified for User Input 7 has already been specified in any of the other user input fields then User Input 7 is not included in the construction of the SQL object. For instance, in example 1 the value of User Input 7 is the same as the value for User Input 3. Once the SQL object has been constructed it can be validated against the database. This object is used in the generation of all the other SQL segments.

The following SQL statement is used to construct the basic SQL object:

```
15  (SELECT      '||User_Input2||',      '||User_input3||',
      '||User_input5||', '||User_input6||', '||User_input7||'
FROM '||User_input1||')
```

This provides the following SQL statements for Example 1:

```
20  (SELECT MGR, EMPNO, SAL, COMM FROM EMP)
```

and for Example 2:

```
25  (SELECT  MGR,  EMPNO,  VER_ID,      BUS_GRP_NO,  ORG_NAME,
      ORGHIER_ID FROM ORG_HIER)
```

The first SQL segment to be generated is that for calculating tree sum and leaf sum aggregate values. These are later incorporated with the SQL segments that perform the hierarchy level and number of subordinates calculations and placed in a single SQL object.

This requires the SQL code generated to perform multiple passes (queries) on the same data within a single query operation. This is achieved by separating the SQL segments that calculate the tree sum and leaf sum aggregates from the SQL segments that calculate the

hierarchy level and number of subordinates. The tree and leaf sum aggregation SQL segments are generated separately, in this case as SQL objects held in a PLSQL function. However, the skilled person will realise that other methods may be used.

These functions are first generated separately then called by the SQL segment that calculates the hierarchy level. Therefore, during the execution of the hierarchy level SQL segment, for each row returned, the tree sum and leaf sum aggregation SQL segments are executed. This allows for multiple passes/queries to be performed on the same data.

The SQL required to calculate the tree sum is different from that required to calculate the leaf sum. Other forms of value hierarchy aggregation can also be implemented using this methodology.

Firstly, the generation of a SQL segment for calculating the tree sum aggregate will be described. If no values exist for User Input 6 then no tree sum SQL segment is generated. If there are values for User Input 6 then a dynamic SQL statement is created for each value entered in User Input 6. This dynamic SQL accepts a parameter value 'Parameter\_Input' which refers to the item for which tree sum aggregation is to be performed. This parameter value is populated when the function is called from the dynamically generated SQL segment that performs the calculation of hierarchy level described later.

The following SQL statement constructs the SQL segment for performing the tree sum aggregation:

```
'SELECT SUM('||User_input_6||') FROM ('||<INSERT BASIC SQL
OBJECT    GENERATED    ABOVE>||' )    CONNECT    BY    PRIOR
'||User_input_3||'    =    '||User_input_2||'    START    WITH
'||User_input_3||' = '||Parameter_Input||';'
```

In the case of Example 1, since User Input 6 has two values (SAL and COMM), executing this SQL statement

generates two SQL segments, one for the SAL column and one for the COMM column. These are:

```
5  SELECT SUM(SAL), FROM (SELECT MGR, EMPNO, SAL, COMM FROM
    EMP) CONNECT BY PRIOR EMPNO = MGR START WITH EMPNO =
    Parameter_Input;
```

and

```
10 SELECT SUM(COMM), FROM (SELECT MGR, EMPNO, SAL, COMM FROM
    EMP) CONNECT BY PRIOR EMPNO = MGR START WITH EMPNO =
    Parameter_Input;
```

15 User Input 6 is not provided for Example 2 and so no SQL is generated for calculating leaf sum aggregates.

The SQL segment generated above is wrapped in a function that is called for each row returned by the SQL that calculates the hierarchy level. The wrapper used in this case is a PLSQL function but other types of wrappers could be used. The PLSQL function wrapper is dynamically generated using the following SQL statement:

```
25 CREATE OR REPLACE FUNCTION tree_' ||User_input_6||'
    (Parameter_Input IN varchar2) RETURN NUMBER IS
    tree_aggregate number (10); CURSOR c1 (CHILDIN varchar2) IS
    ' ||<INSERT ABOVE SQL SEGMENT FOR PERFORMING TREE SUM
    AGGREGATION>||' BEGIN OPEN c1 (Parameter_Input); FETCH c1
    INTO tree_aggregate; CLOSE c1; RETURN(tree_aggregate); END
    TREE_' ||User_input_6||';
```

30

The function is then dynamically created against the database. In the case of Example 1, this generates two SQL segments, one for SAL and one for COMM:

```
35 CREATE OR REPLACE FUNCTION tree_SAL(Parameter_Input IN
    varchar2) RETURN NUMBER IS tree_aggregate number(10);
    CURSOR c1 (CHILDIN varchar2) IS SELECT SUM(SAL), FROM
```

```
(SELECT MGR, EMPNO, SAL, COMM FROM EMP) CONNECT BY PRIOR
EMPNO = MGR START WITH EMPNO = Parameter_Input; BEGIN OPEN
c1 (Parameter_Input); FETCH c1 INTO tree_aggregate; CLOSE
c1; RETURN(tree_aggregate); END tree_SAL;
```

5

and

```
CREATE OR REPLACE FUNCTION tree_COMM(Parameter_Input IN
varchar2) RETURN NUMBER IS tree_aggregate number(10);
10 CURSOR c1 (childin varchar2) IS SELECT SUM(COMM), FROM
(SELECT MGR, EMPNO, SAL, COMM FROM EMP) CONNECT BY PRIOR
EMPNO = MGR START WITH EMPNO = Parameter_Input; BEGIN OPEN
c1 (Parameter_Input); FETCH c1 INTO tree_aggregate; CLOSE
c1; RETURN(tree_aggregate); END tree_COMM;
```

15

User Input 6 is not provided for Example 2 and so no SQL is generated for calculating leaf sum aggregates.

The generation of the SQL segment for performing leaf sum aggregation is implemented in a similar way to that for performing tree sum aggregation although it is more complex. Again, if no values are entered for User Input 6 then no leaf sum aggregation function is generated. If there are values for 'User Input 6' then a dynamic SQL statement is created for each value entered in User Input

25 6. This dynamic SQL statement accepts a parameter value 'Parameter\_Input'. This parameter value is populated when the function is called from the dynamically generated SQL statement for calculating the hierarchy level, as described later.

30 The following SQL statement constructs the SQL segment for performing the tree sum aggregation:

```
SELECT SUM('||User_input_6||') FROM ('||<INSERT BASIC SQL
OBJECT GENERATED ABOVE>||') A WHERE '||User_input_3||' IN
35 (select B.'||User_input_3||' FROM ('||<INSERT BASIC SQL
OBJECT GENERATED ABOVE>||') B WHERE NOT EXISTS (SELECT
C.'||User_input_6||' FROM ('||<INSERT BASIC SQL OBJECT
```

```

GENERATED ABOVE>||' ) C WHERE C.'||User_input_2||' =
B.'||User_input_3||') CONNECT BY PRIOR B.'||
User_input_3||' = B.'||User_input_2||' START WITH
B.'||User_input_3||' = Parameter_Input ');

```

5

In the case of Example 1, since User Input 6 has two values (SAL and COMM), this SQL statement generates two SQL segments, one for SAL and one for COMM. These are:

```

10 SELECT SUM(SAL) FROM (SELECT MGR, EMPNO, SAL, COMM FROM
EMP) A WHERE EMPNO IN (SELECT B.EMPNO FROM (SELECT MGR,
EMPNO, SAL, COMM FROM EMP) B WHERE NOT EXISTS (SELECT
C.SAL FROM (SELECT MGR, EMPNO, SAL, COMM FROM EMP) C
WHERE C.MGR = B.EMPNO) CONNECT BY PRIOR B.EMPNO = B.MGR
15 START WITH B.EMPNO = Parameter_Input);

```

and

```

20 SELECT SUM(COMM) FROM (SELECT MGR, EMPNO, SAL, COMM FROM
EMP) A WHERE EMPNO IN (SELECT B.EMPNO FROM (SELECT MGR,
EMPNO, SAL, COMM FROM EMP) B WHERE NOT EXISTS (SELECT
C.COMM FROM (SELECT MGR, EMPNO, SAL, COMM FROM EMP) C
WHERE C.MGR = B.EMPNO) CONNECT BY PRIOR B.EMPNO = B.MGR
START WITH B.EMPNO = Parameter_Input);

```

25

User Input 6 is not provided for Example 2 and so no SQL is generated for calculating tree sum aggregates.

The SQL segments generated are wrapped in a function that is called for each row returned by the SQL segment that calculates the hierarchy level. The wrapper used in this case is a PLSQL function but other types of wrappers could be used. The PLSQL function wrapper is dynamically generated using the following SQL statement:

```

35 CREATE OR REPLACE FUNCTION leaf_
||User_input_6||'(Parameter_Input IN varchar2) RETURN
NUMBER IS leaf_aggregate number (10); CURSOR c1 (CHILDIN

```

```

varchar2) is '||<INSERT ABOVE SQL SEGMENT FOR PERFORMING
LEAF SUM AGGREGATION>||' BEGIN OPEN c1 (Parameter_Input);
FETCH          c1      INTO      leaf_aggregate;      CLOSE      c1;
RETURN(leaf_aggregate); END leaf_' ||User_input_6||';

```

- 5       The function is then dynamically created against the database. In the case of Example 1, this generates two SQL segments, one for SAL and one for COMM:

```

CREATE OR REPLACE FUNCTION leaf_SAL(Parameter_Input IN
10 varchar2) RETURN NUMBER IS leaf_aggregate NUMBER (10);
CURSOR c1 (childin varchar2) IS SELECT SUM(SAL) FROM
(SELECT MGR, EMPNO, SAL, COMM FROM EMP) A WHERE EMPNO IN
(SELECT B.EMPNO FROM (SELECT MGR, EMPNO, SAL, COMM FROM
EMP) B WHERE NOT EXISTS (SELECT C.SAL FROM (SELECT MGR,
15 EMPNO, SAL, COMM FROM EMP) C WHERE C.MGR = B.EMPNO) CONNECT
BY PRIOR B.EMPNO = B.MGR START WITH B.EMPNO =
PARAMETER_INPUT); BEGIN OPEN c1 (Parameter_Input); FETCH
c1 INTO leaf_aggregate; CLOSE c1; RETURN(leaf_aggregate);
END leaf_SAL;

```

20

```

CREATE OR REPLACE FUNCTION leaf_COMM(Parameter_Input IN
varchar2) RETURN NUMBER IS leaf_aggregate NUMBER (10);
CURSOR c1 (childin varchar2) IS SELECT SUM(COMM) FROM
(SELECT MGR, EMPNO, SAL, COMM FROM EMP) A WHERE EMPNO IN
25 (SELECT B.EMPNO FROM (SELECT MGR, EMPNO, SAL, COMM FROM
EMP) B WHERE NOT EXISTS (SELECT C.COMM FROM (SELECT MGR,
EMPNO, SAL, COMM FROM EMP) C WHERE C.MGR = B.EMPNO) CONNECT
BY PRIOR B.EMPNO = B.MGR START WITH B.EMPNO =
PARAMETER_INPUT); BEGIN OPEN c1 (Parameter_Input); FETCH
30 c1 INTO leaf_aggregate; CLOSE c1; RETURN(leaf_aggregate);
END leaf_COMM;

```

User Input 6 is not provided for Example 2 and so no SQL is generated for calculating tree sum aggregates.

- 35       Once the PLSQL functions have been generated they are created against the database.

The construction of the SQL for calculating the hierarchy level incorporating the tree and leaf sum aggregate functions consists of generating two SQL select statements. The first is an SQL statement for calculating  
 5 the hierarchy level and calling the aggregate functions. The second is an SQL statement for calculating the hierarchy level combined with the aggregate values.

These SQL statements are then combined using inline views to create a single SQL statement that calculates the  
 10 hierarchy level and the tree and leaf sum aggregate values. If no values are provided for User Input 6 then the SQL statements only calculate the hierarchy level.

The first SQL statement is used to calculate the hierarchy level and call the dynamically created functions  
 15 that calculate the tree and leaf sum aggregates.

The number of aggregate functions created will depend on the number of values entered by the user for User Input 6. The number of aggregation functions affects the dynamic creation of the SQL SELECT clause. The higher the number  
 20 of aggregate items, the longer the SELECT clause will be. There is a repeating pattern to the creation of this SELECT clause. Each aggregate item creates two functions, one to find the leaf sum aggregate and one to find the tree sum aggregate.

25 The following string, known as the aggregate function string, is generated for each aggregate item entered into User Input 6:

```

tree_ ' ||User_input_6||'('||User_input_3||')' AS ''
30 ||User_input_6||'_treesum', leaf_ ' ||User_input_6||'
('||User_input_3||')' AS '' ||User_input_6||'_leafsum"

```

In the case of Example 1, this string is generated for each value of User Input 6, SAL and COMM, and the resultant  
 35 two strings are concatenated:



```

tree_SAL(EMPNO) AS "SAL_treesum", leaf_SAL(EMPNO) AS
"SAL_leafsum", tree_COMM(EMPNO) AS "COMM_treesum",
leaf_COMM(EMPNO) AS "COMM_leafsum",

```

5        User Input 6 is not provided for Example 2 and so the strings are not generated.

      The following string, known as the key items string, is generated for each value entered for User Input 5:

```

10    ||User_input_5||' AS "' ||User_input_5||' "

```

      If no values are entered for User Input 5 then this string is not created. Since, User Input 5 is not provided for Example 1 and so the strings are not generated.

15        With respect to Example 2, two values are provided for User Input 5 and so these two values are included in the string:

```

20    BUS_GRP_NO AS "BUS_GRP_NO", VER_ID AS "VER_ID",

```

      If a user has identified and input a primary key for User Input 7 then a string, known as the primary key string, is created as follows:

```

25    ||User_input_7||' AS " ' ||User_input_7||'_pk", '

```

      If no values are entered for User Input 7 then this string is not created.

30        In the case of Example 1, the following string is created:

```

EMPNO AS "EMPNO_pk"

```

35        In the case of Example 2, the following string is created:

```

ORGHIER_ID as "ORGHIER_ID_pk"

```

The user is required to identify the start point of the hierarchy via User Input 4. If no value is given for this then a default value of NULL is assumed. However, if a value is given then a string, known as the start point string, is generated as follows:

```
' = '||User_input_4
```

If no value or NULL is entered then the string is generated as:

```
'IS NULL'
```

Therefore, with respect to Example 1, the following string is created:

```
IS NULL
```

In Example 2, the start point is defined as the value "0" and so the string is created as:

```
= 0
```

The next string, known as the CONNECT BY string, to be created is made up of the values entered for User Input 5 concatenated with the parent items and the child items values entered for User Inputs 2 and 3 respectively as shown below:

```
User_input_5||' || '|| User_input_3||'
= '|| User_input_5||' || '|| User_input_2
```

If no values exist for 'User Input 5' then the following string is created instead:

```
User_input_3||' = ' ||User_input_2
```

If more than one value exists for 'User Input 5' then the strings created for each item are concatenated.

With respect to Example 1, no User Input 5 values exist and so the following string is created:

EMPNO = MGR

In Example 2, two values exist for User Input 5 and so two strings are created and concatenated:

VER\_ID||BUS\_GRP\_NO||EMPNO = VER\_ID||BUS\_GRP\_NO||MGR

An SQL statement is then created from the strings created above as shown below:

```
(SELECT LEVEL AS LVL, <INSERT KEY ITEMS STRING>, <INSERT
AGGREGATE FUNCTIONS STRING>,<INSERT PRIMARY KEY STRING>,'
||User_input_2||' AS " " ||User_input_2||' ", '
||User_input_3||' AS " " ||User_input_2||' " FROM '||<INSERT
BASIC SQL OBJECT GENERATED ABOVE>||' B CONNECT BY PRIOR '
<INSERT CONNECT BY STRING>' START WITH ' ||User_input_2||'
<INSERT START POINT STRING>)
```

This SQL statement can then be validated against the database to check that the SQL syntax construction is correct.

For Example 1, this creates the following SQL statement:

```
(SELECT LEVEL AS LVL, TREE_SAL(EMPNO) AS "SAL_TREESUM",
LEAF_SAL(EMPNO) AS "SAL_LEAFSUM", TREE_COMM(EMPNO) AS
"COMM_TREESUM", LEAF_COMM(EMPNO) AS "COMM_LEAFSUM", EMPNO
AS "EMPNO_PK", MGR AS "MGR" FROM (SELECT MGR, EMPNO, SAL,
COMM FROM EMP) B CONNECT BY PRIOR (EMPNO = MGR) START WITH
MGR IS NULL)
```

For Example 2, the following SQL statement is generated:

```

5  (SELECT LEVEL AS LVL, BUS_GRP_NO AS "BUS_GRP_NO", VER_ID AS
    "VER_ID", ORGHIER_ID AS "ORGHIER_ID_pk", MGR AS "MGR",
    EMPNO AS "EMPNO", FROM (SELECT MGR, EMPNO, VER_ID,
    BUS_GRP_NO, ORG_NAME, ORGHIER_ID FROM ORG_HIER)B CONNECT BY
    PRIOR (VER_ID||BUS_GRP_NO||EMPNO=VER_ID||BUS_GRP_NO||MGR)
    START WITH MGR = 0)

```

10

In order to construct the second SQL statement for calculating the hierarchy level combined with the aggregate values, a string is constructed that prepares the SQL generated statement generated above for joining with the SQL segment for calculating the number of subordinates described below.

The second statement is comprised of several strings. The first of these strings is known as the outer aggregate values string. Its composition depends on the number of values entered into User Input 6. If no values are entered then the string is left empty. If one aggregate item is entered then the string is as follows:

```

25  "'||User_input_6||'_treesum','||User_input_6||'_leafsum"

```

If more than one value has been entered into User Input 6 then a string is created for each value and all the strings are concatenated but separated by commas.

In Example 1, there are two values of User Input 6, SAL and COMM, so the resultant string is:

```

    "SAL_treesum","SAL_leafsum","COMM_treesum","COMM_leafsum"

```

Example 2 has no values for User Input 6 and so no string is created.

The next string to be created is the outer key values string. The creation follows the same pattern as

for the outer aggregate values string but is based on User Input 5. If User Input 5 values exist then the string is:

5    "'||User\_input\_5||'"

If more than one value exists then a string for each value is concatenated to form a comma separated string.

Example 1 has no value entered for User Input 5 and so no string is created.

Example 2 has two values for User Input 5 and so the following string is created:

15    "BUS\_GRP\_NO", "VER\_ID"

The next string is known as the outer primary key string. It is generated following the same principal as the outer key values string but based on User Input 7. If User Input 7 values exist then the string is:

20    "'||User\_input\_7||'\_pk"

If User Input 7 has no value then no string is created.

25    For Example 1 the following string is created:

"EMPNO\_pk"

30    For Example 2 the following string is created:

"ORGHIER\_ID\_pk"

35    The four strings generated above are then combined to form the second SQL statement, known as the final outer level aggregation SQL statement, as shown below:

```

      (SELECT LVL, <INSERT OUTER KEY VALUES STRING>, <INSERT
OUTER AGGREGATE VALUES STRING>, <INSERT OUTER PRIMARY KEY
STRING> , '  ' || User_input_2 || '  ' , '  ' || User_input_3 || '  '
FROM <INSERT BASIC SQL OBJECT GENERATED ABOVE> || '  B
5  CONNECT BY PRIOR ' <INSERT CONNECT BY STRING>' START
WITH ' || User_input_2 || ' <INSERT START POINT STRING>) X

```

10 This SQL statement can be run or validated, at this point, against the database to check for syntactical errors.

For Example 1, the second SQL statement is generated as follows:

```

      (SELECT LVL, "SAL_TREESUM", "SAL_LEAFSUM",
15  "COMM_TREESUM", "COMM_LEAFSUM", "EMPNO_PK", "MGR",
"EMPNO" FROM (SELECT LEVEL AS LVL, TREE_SAL(EMPNO) AS
"SAL_TREESUM", LEAF_SAL(EMPNO) AS "SAL_LEAFSUM",
TREE_COMM(EMPNO) AS "COMM_TREESUM", LEAF_COMM(EMPNO) AS
"COMM_LEAFSUM", EMPNO AS "EMPNO_PK", MGR, EMPNO FROM
20  (SELECT MGR, EMPNO, SAL, COMM FROM EMP) B CONNECT BY
PRIOR EMPNO = MGR START WITH MGR IS NULL) X

```

Example 2 requires no aggregation and so the following statement is generated:

```

25  (SELECT LVL, "BUS_GRP_NO", "VER_ID", "ORGHIER_ID_PK",
"MGR", "EMPNO" FROM (SELECT LEVEL AS LVL, BUS_GRP_NO AS
"BUS_GRP_NO", VER_ID AS "VER_ID", ORGHIER_ID AS
"ORGHIER_ID_pk", MGR AS "MGR", EMPNO AS "EMPNO", FROM
30  (SELECT MGR, EMPNO, VER_ID, BUS_GRP_NO, ORG_NAME,
ORGHIER_ID FROM ORG_HIER) B CONNECT BY PRIOR
(VER_ID || BUS_GRP_NO || EMPNO=VER_ID || BUS_GRP_NO || MGR) START
WITH MGR = 0 ) X

```

35 It is now necessary to construct the SQL segment for calculating the number of subordinates for each record in the hierarchy.

In order to do this, a string known as the subordinates connect by string is first created from the values of User Input 5 concatenated with the values of the parent items and the child items from User Inputs 2 and 3 respectively. The string is created as shown below:

```
User_input_5||'||'||User_input_2||' =
'|User_input_5||'||'||User_input_3
```

10

If no values exist for 'User Input 5' then the following string is created instead:

```
User_input_2||' = ' ||User_input_3
```

15

If more than one value exists for 'User Input 5' then the strings created for each item are concatenated.

With respect to Example 1, no User Input 5 values exist and so the following string is created:

20

```
(MGR = EMPNO)
```

In Example 2, two values exist for User Input 5 and so two strings are created and concatenated:

25

```
(VER_ID||BUS_GRP_NO||MGR=VER_ID||BUS_GRP_NO||EMPNO)
```

An SQL statement, known as the subordinates select SQL statement, is then created from this string to find the number of aggregates at each of the node points in the hierarchy:

30

```
'(SELECT SUBORDINATES, ' ||User_input_5|','
||User_input_2|',' ||User_input_3|',' ||User_input_7|'
35 FROM ( SELECT COUNT(*) -1 AS SUBORDINATES,
||User_input_5|',' ||User_input_2|','
||User_input_3|',' ||User_input_7|' FROM ('||<INSERT
```

```

BASIC SQL OBJECT GENERATED ABOVE>||') B CONNECT BY
PRIOR'<INSERT SUBORDINATES CONNECT BY STRING>'GROUP BY
'||User_input_5|',' ||User_input_2||','
||User_input_3||',' ||User_input_7||') Y'

```

5

If User Input 5 has no values then it is omitted from the SQL statement shown above. If User Input 5 contains more than one value, each value is included but they are separated by commas.

10 If User Input 7 has no values or if it is identical to User Input 3 then it is omitted from the SQL statement shown above.

This SQL statement can be run or validated, at this point, against the database to check for syntactical errors.

15

In the case of Example 1, the SQL segment for calculating the number of subordinates is:

```

(SELECT SUBORDINATES, MGR, EMPNO, FROM (SELECT
COUNT(*)-1 AS SUBORDINATES, MGR,EMPNO FROM (SELECT MGR,
20 EMPNO, SAL, COMM FROM EMP) B CONNECT BY PRIOR (MGR=EMPNO)
GROUP BY MGR, EMPNO))Y

```

25 In the case of Example 2, the corresponding SQL segment is:

```

(SELECT SUBORDINATES, BUS_GRP_NO, VER_ID, MGR, EMPNO,
ORGHIER_ID FROM (SELECT COUNT(*)-1 AS SUBORDINATES,
BUS_GRP_NO, VER_ID,MGR, EMPNO, ORG_HIER_ID FROM (SELECT
30 MGR, EMPNO, VER_ID, BUS_GRP_NO, ORG_NAME, ORGHIER_ID
FROM ORG_HIER)B CONNECT BY PRIOR
(VER_ID||BUS_GRP_NO||MGR=VER_ID||BUS_GRP_NO||EMPNO) GROUP
BY BUS_GRP_NO, VER_ID, MGR, EMPNO, ORGHIER_ID))Y

```

35 As previously described, the SQL segments generated for calculating the tree and leaf sum aggregates, the level and number of subordinates are combined into a



final SQL statement. In order to do this, two strings are first created.

The first string, known as the key select string is created from the values of User Input 7 provided. It is  
5 created as:

```
'||User_input_7||'_pk''
```

However, if there is no value for User Input 7 then  
10 the key select string is:

```
'||User_input_3||'', '|| User_input_5||'', '||
```

If User Input 5 contains more than one value then  
15 each value is concatenated in a comma separated format.

If there are no values for both User Input 7 and User Input 5 then the key select string is:

```
'||User_input_3||''  
20
```

In the case of Example 1, the key select string is:

```
"EMPNO_pk"
```

25 In the case of Example 2, it is:

```
"ORGHIER_ID_pk"
```

In both examples values of User Input 7 exist, but  
30 to illustrate the point, if they did not, then the strings would be instead:

Example 1: "EMPNO"

Example 2: "EMPNO", "BUS\_GRP\_NO", "VER\_ID"

The next string is known as the where clause string. It is constructed from the input values provided as shown below:

```
5  WHERE x.''||User_input_2||' ' = y.''||User_input_2||' '(+)
   AND x.''||User_input_3||' ' = y.''||User_input_3||' '(+) ' AND
   x.''||User_input_5||' ' = y.''||User_input_5||' '(+)'
```

If no values exist for User Input 5 then the string is modified such that it does not refer to this as is shown below with respect to Example 1. If User Input 5 has more than one value then each value is repeated and concatenated to the end of the string as is shown below with respect to Example 1:

15 In the case of Example 1, where no User Input 5 values exist, the where clause string is:

```
'WHERE x."MGR" = y.MGR(+) AND x."EMPNO" = y.EMPNO(+)'
```

20 In the case of Example 2, where two User Input 5 values are provided, the where clause string is:

```
'WHERE x."MGR" = y.MGR(+) AND x."EMPNO" = y.EMPNO(+) AND
   x."VER_ID" = y.VER_ID(+) AND x."BUS_GRP_NO" =
25 y.BUS_GRP_NO(+)'
```

All the dynamically created SQL segments together with the key select and where clause strings are combined into a single SQL statement as shown:

```
30 'SELECT LVL, SUBORDINATES, <INSERT OUTER AGGREGATE VALUES
   STRING>, <INSERT KEY SELECT STRING> FROM <INSERT FINAL
   OUTER LEVEL AGGREGATION SQL STATEMENT>, <INSERT
   SUBORDINATES SELECT SQL STATEMENT> <INSERT WHERE CLAUSE
35 STRING>
```

This dynamic SQL statement once created can be run or validated on the database to check for syntactical errors.

- 5 In the case of Example 1, the following final SQL statement is generated:

```

SELECT LVL, SUBORDINATES, "SAL_TREESUM", "SAL_LEAFSUM",
"COMM_TREESUM", "COMM_LEAFSUM", "EMPNO_PK" FROM (SELECT
10 LVL, "SAL_TREESUM", "SAL_LEAFSUM", "COMM_TREESUM",
"COMM_LEAFSUM", "EMPNO_PK", "MGR", "EMPNO" FROM (SELECT
LEVEL AS LVL, TREE_SAL(EMPNO) AS "SAL_TREESUM",
LEAF_SAL(EMPNO) AS "SAL_LEAFSUM", TREE_COMM(EMPNO) AS
"COMM_TREESUM", LEAF_COMM(EMPNO) AS "COMM_LEAFSUM", EMPNO
15 AS "EMPNO_PK", MGR, EMPNO FROM (SELECT MGR, EMPNO, SAL,
COMM FROM EMP) B CONNECT BY PRIOR EMPNO = MGR START WITH
MGR IS NULL) X (SELECT SUBORDINATES, MGR, EMPNO, FROM
(SELECT COUNT(*)-1 AS SUBORDINATES, MGR,EMPNO FROM
(SELECT MGR, EMPNO, SAL, COMM FROM EMP) B CONNECT BY
20 PRIOR (MGR=EMPNO) GROUP BY MGR, EMPNO))Y> 'WHERE X."MGR"
= Y.MGR(+) AND X."EMPNO" = Y.EMPNO(+)'

```

For Example 2, the final SQL statement is:

```

25 SELECT LVL, SUBORDINATES, "ORGHIER_ID_PK" FROM (SELECT
LVL, "BUS_GRP_NO", "VER_ID", "ORGHIER_ID_PK", "MGR",
"EMPNO" from (SELECT LEVEL AS LVL, BUS_GRP_NO AS
"BUS_GRP_NO", VER_ID AS "VER_ID", ORGHIER_ID AS
"ORGHIER_ID_PK", MGR AS "MGR", EMPNO AS "EMPNO", FROM
30 (SELECT MGR, EMPNO, VER_ID, BUS_GRP_NO, ORG_NAME FROM
ORG_HIER)B CONNECT BY PRIOR
(VER_ID||BUS_GRP_NO||EMPNO=VER_ID||BUS_GRP_NO||MGR) START
WITH MGR = 0 ) X (SELECT SUBORDINATES, BUS_GRP_NO,
VER_ID, MGR, EMPNO, ORGHIER_ID FROM (SELECT COUNT(*)-1
35 AS SUBORDINATES, BUS_GRP_NO, VER_ID,MGR, EMPNO,
ORGHIER_ID FROM (SELECT MGR, EMPNO, VER_ID, BUS_GRP_NO,
ORG_NAME, ORGHIER_ID FROM ORG_HIER)B CONNECT BY PRIOR

```

```

    (VER_ID||BUS_GRP_NO||MGR=VER_ID||BUS_GRP_NO||EMPNO) GROUP
    BY BUS_GRP_NO, VER_ID, MGR, EMPNO, ORGHIER_ID))Y WHERE
    X."MGR" = Y.MGR(+) AND X."EMPNO" = Y.EMPNO(+) AND
    X."VER_ID" = Y.VER_ID(+) AND X."BUS_GRP_NO" =
5    Y.BUS_GRP_NO(+)

```

The final SQL statement, once it has been created, can be hidden inside a database object such as a view, using the following SQL statement:

```

10  'CREATE VIEW'|| User_input_1||'_VH AS (<INSERT FINAL SQL
    STATEMENT STRING>);'

```

This view can then be dynamically generated and treated like a table and be used by analysis tools (such as Discoverer) to extract information on hierarchy levels, number of subordinates, hierarchical node aggregation and node identification (leaf or tree). This can be done without the analysis tool having to generate any special SQL syntax, for example using CONNECT BY or START WITH clauses

For Example 1, a seven-column view is created as defined below:

```

25  CREATE VIEW EMP_VH AS (SELECT LVL, SUBORDINATES,
    "SAL_TREESUM", "SAL_LEAFSUM", "COMM_TREESUM",
    "COMM_LEAFSUM", "EMPNO_PK" FROM (SELECT LVL,
    "SAL_TREESUM", "SAL_LEAFSUM", "COMM_TREESUM",
    "COMM_LEAFSUM", "EMPNO_PK", "MGR", "EMPNO" FROM (SELECT
30  LEVEL AS LVL, TREE_SAL(EMPNO) AS "SAL_TREESUM",
    LEAF_SAL(EMPNO) AS "SAL_LEAFSUM", TREE_COMM(EMPNO) AS
    "COMM_TREESUM", LEAF_COMM(EMPNO) AS "COMM_LEAFSUM", EMPNO
    AS "EMPNO_PK", MGR, EMPNO FROM (SELECT MGR, EMPNO, SAL,
    COMM FROM EMP) B CONNECT BY PRIOR EMPNO = MGR START WITH
35  MGR IS NULL) X (SELECT SUBORDINATES, MGR, EMPNO, FROM
    (SELECT COUNT(*)-1 AS SUBORDINATES, MGR,EMPNO FROM
    (SELECT MGR, EMPNO, SAL, COMM FROM EMP) B CONNECT BY

```

```
PRIOR (MGR=EMPNO) GROUP BY MGR, EMPNO))Y> 'WHERE X."MGR"
= Y.MGR(+) AND X."EMPNO" = Y.EMPNO(+)')
```

5 The seven column view will contain the following  
columns:

Column Number	Column Name	Description
1	EMPNO_PK	Primary Key
10 2	LVL	A pseudo column that interrogates the hierarchy to find, for each row of data, its level within the hierarchy
3	SUBORDINATES	The number of subordinate rows of data for this record within the hierarchy
4	SAL_TREESUM	Tree sum aggregation for SAL
5	SAL_LEAFSUM	Leaf sum aggregation for SAL
6	COMM_TREESUM	Tree sum aggregation for COMM
15 7	COMM_LEAFSUM	Leaf sum aggregation for COMM

If desired, this seven column view can then be joined back the EMP table shown in Figure 1 using a one to one join between the EMPNO column of EMP and EMPNO\_PK column of the view. A user is then able to select an employee and extract, via the join, the employees level, number of subordinates, SAL tree and leaf sum and COMM leaf and tree sum without the user having to enter any complex SQL.

25 In the case of Example 2 a three column view is created:

```
CREATE VIEW ORG_HIER_VH AS (SELECT LVL, SUBORDINATES,
"ORGHIER_ID_PK" FROM (SELECT LVL, "BUS_GRP_NO",
30 "VER_ID", "ORGHIER_ID_PK", "MGR", "EMPNO" FROM (SELECT
LEVEL AS LVL, BUS_GRP_NO AS "BUS_GRP_NO", VER_ID AS
```

```

"VER_ID", ORGHIER_ID AS "ORGHIER_ID_PK", MGR AS "MGR",
EMPNO AS "EMPNO", FROM (SELECT MGR, EMPNO, VER_ID,
BUS_GRP_NO, ORG_NAME, ORGHIER_ID FROM ORG_HIER)B CONNECT
BY PRIOR
5  (VER_ID||BUS_GRP_NO||EMPNO=VER_ID||BUS_GRP_NO||MGR) START
WITH MGR = 0 ) X (SELECT SUBORDINATES, BUS_GRP_NO,
VER_ID, MGR, EMPNO, ORGHIER_ID FROM (SELECT COUNT(*)-1
AS SUBORDINATES, BUS_GRP_NO, VER_ID,MGR, EMPNO,
ORGHIER_ID FROM (SELECT MGR, EMPNO, VER_ID, BUS_GRP_NO,
10 ORG_NAME, ORGHIER_ID FROM ORG_HIER)B CONNECT BY PRIOR
(VER_ID||BUS_GRP_NO||MGR=VER_ID||BUS_GRP_NO||EMPNO) GROUP
BY BUS_GRP_NO, VER_ID, MGR, EMPNO, ORGHIER_ID))Y WHERE
X."MGR" = Y.MGR(+) AND X."EMPNO" = Y.EMPNO(+) AND
X."VER_ID" = Y.VER_ID(+) AND X."BUS_GRP_NO" =
15 Y.BUS_GRP_NO(+))

```

The three column view will contain the following columns:

20

Column Number	Column Name	Description
1	ORGHIER_ID_PK	Primary Key
2	LVL	Pseudo column that interrogates the hierarchy to find, for each row of data, its level within the hierarchy
3	SUBORDINATES	The number of subordinate rows of data for this record within the hierarchy

25

This view can then be joined to the ORG\_HIER table shown in Figure 6 using a one to one join between the ORGHIER\_ID column of ORG\_HIER table and the ORGHIER\_ID\_PK column of the view. A user can then extract level and

30 number of subordinates data for each record in ORG\_HIER.

CLAIMS

1. A computer implemented method for extracting hierarchical data from one or more tables in a database,  
5 the method comprising:
  - a. receiving user input identifying, at least, one or more tables in the database that contain the hierarchical data and the hierarchical structure of the hierarchical data;
  - 10 b. generating a Structured Query Language (SQL) statement using the user input received in step (a);
  - c. presenting the SQL statement to the database for execution; and,
  - 15 d. extracting the hierarchical data from the database in response to the execution of the SQL statement.
2. A method according to claim 1, wherein the user input identifying the hierarchical structure indicates at  
20 least a column of one of the database tables that represents the parent items of the hierarchical structure and a column of one of the database tables that represents the child items of the hierarchical structure.
3. A method according to claim 2, wherein the data  
25 value that is the top of the hierarchical structure has a default value of NULL.
4. A method according to claim 2, wherein the user input identifying the hierarchical structure indicates the data value in the column representing the parent  
30 items that is the top of the hierarchical structure.
5. A method according to any of claims 2 to 4, wherein the user input identifying the hierarchical structure indicates at least one further column of one of the tables that further restricts the hierarchy.
- 35 6. A method according to any of the preceding claims, wherein, prior to generating the SQL statement, further user input is received, the user input indicating at

least one column of one of the database tables on which leaf sum aggregation should be performed.

7. A method according to any of the preceding claims, wherein, prior to generating the SQL statement, further  
5 user input is received, the user input indicating at least one column of one of the database tables on which tree sum aggregation should be performed.

8. A method according to any of the preceding claims, wherein the SQL statement is generated from the user  
10 input by:

- i. constructing object SQL that will return all the database items identified by the user input;
- 15 ii. constructing object SQL that calculates the level of an item in the hierarchical structure;
- iii. constructing object SQL that calculates the number of child items appendant to an item in the hierarchical structure; and,
- 20 iv. combining the object SQL of steps (i) to (iii) in a single object SQL statement.

9. A method according to claim 8 when dependent on claim 6, wherein further object SQL that performs the leaf sum aggregation is constructed and this further  
25 object SQL is combined with the object SQL of steps (i) to (iii) in step (iv).

10. A method according to claim 8 or claim 9 when dependent on claim 7, wherein further object SQL that performs the tree sum aggregation is constructed and this  
30 further object SQL is combined with the object SQL of steps (i) to (iii) in step (iv).

11. A computer program comprising computer program code means adapted to perform the steps of any of the preceding claims when said program is run on a computer.

35 12. A computer program product comprising program code means stored on a computer readable medium for performing



the method of any of claims 1 to 10 when said program product is run on a computer.

13. A method substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACTHIERARCHICAL DATA EXTRACTION


5        A computer implemented method is provided for  
extracting hierarchical data from one or more tables in a  
database, the method comprises firstly receiving user  
input identifying, one or more tables in the database  
that contain the hierarchical data and the hierarchical  
10       structure of the hierarchical data. A Structured Query  
Language (SQL) statement is then generated using the user  
input received. The SQL statement is presented to the  
database for execution and the hierarchical data are then  
extracted from the database in response to the execution  
15       of the SQL statement.

(Figure 6)

# EMP

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	COMM	DEPTNO
7369	SMITH	CLERK	7902	17-DEC-80	800	0	20
7499	ALLEN	SALESMAN	7698	20-FEB-81	1600	300	30
7521	WARD	SALESMAN	7698	22-FEB-81	1250	500	30
7566	JONES	MANAGER	7839	02-APR-81	2975	0	20
7654	MARTIN	SALESMAN	7698	28-SEP-81	1250	1400	30
7698	BLAKE	MANAGER	7839	01-MAY-81	2850	0	30
7782	CLARK	MANAGER	7839	09-JUN-81	2450	0	10
7788	SCOTT	ANALYST	7566	19-APR-87	3000	0	20
7839	KING	PRESIDENT	NULL	17-NOV-81	5000	0	10
7844	TURNER	SALESMAN	7698	08-SEP-81	1500	0	30
7876	ADAMS	CLERK	7788	23-MAY-87	1100	0	20
7900	JAMES	CLERK	7698	03-DEC-81	950	0	30
7902	FORD	ANALYST	7566	03-DEC-81	3000	0	20
7934	MILLER	CLERK	7782	23-JAN-82	1300	0	10

Figure 1

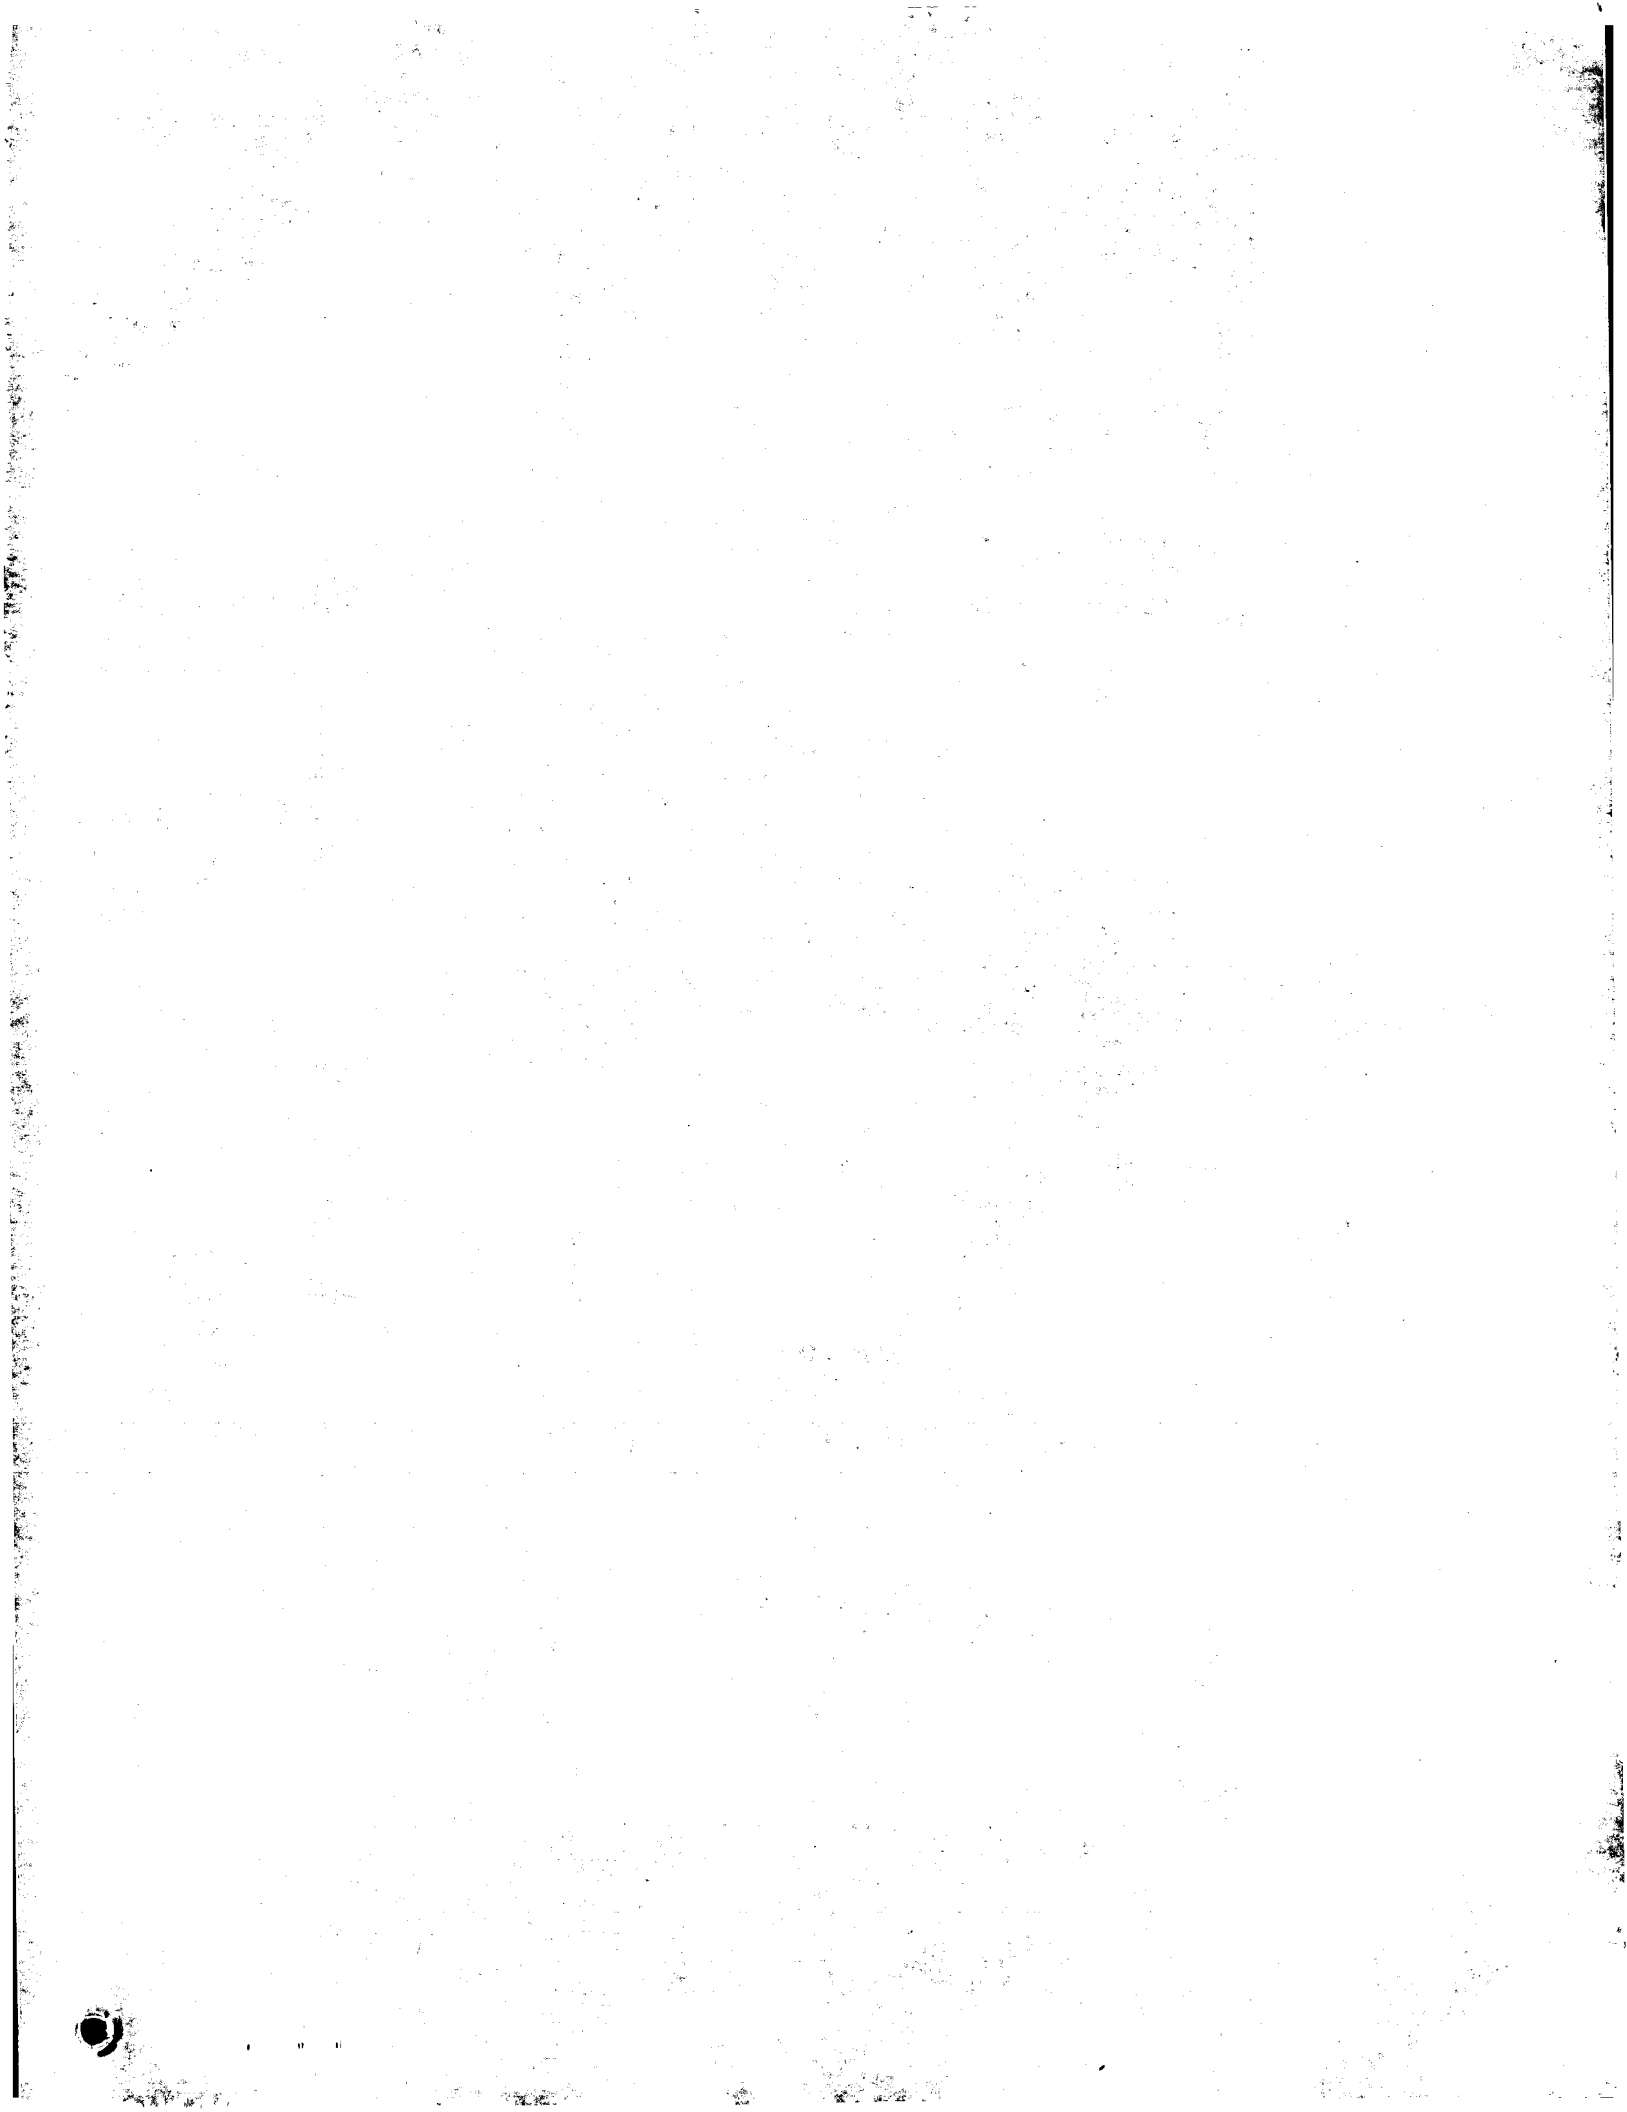


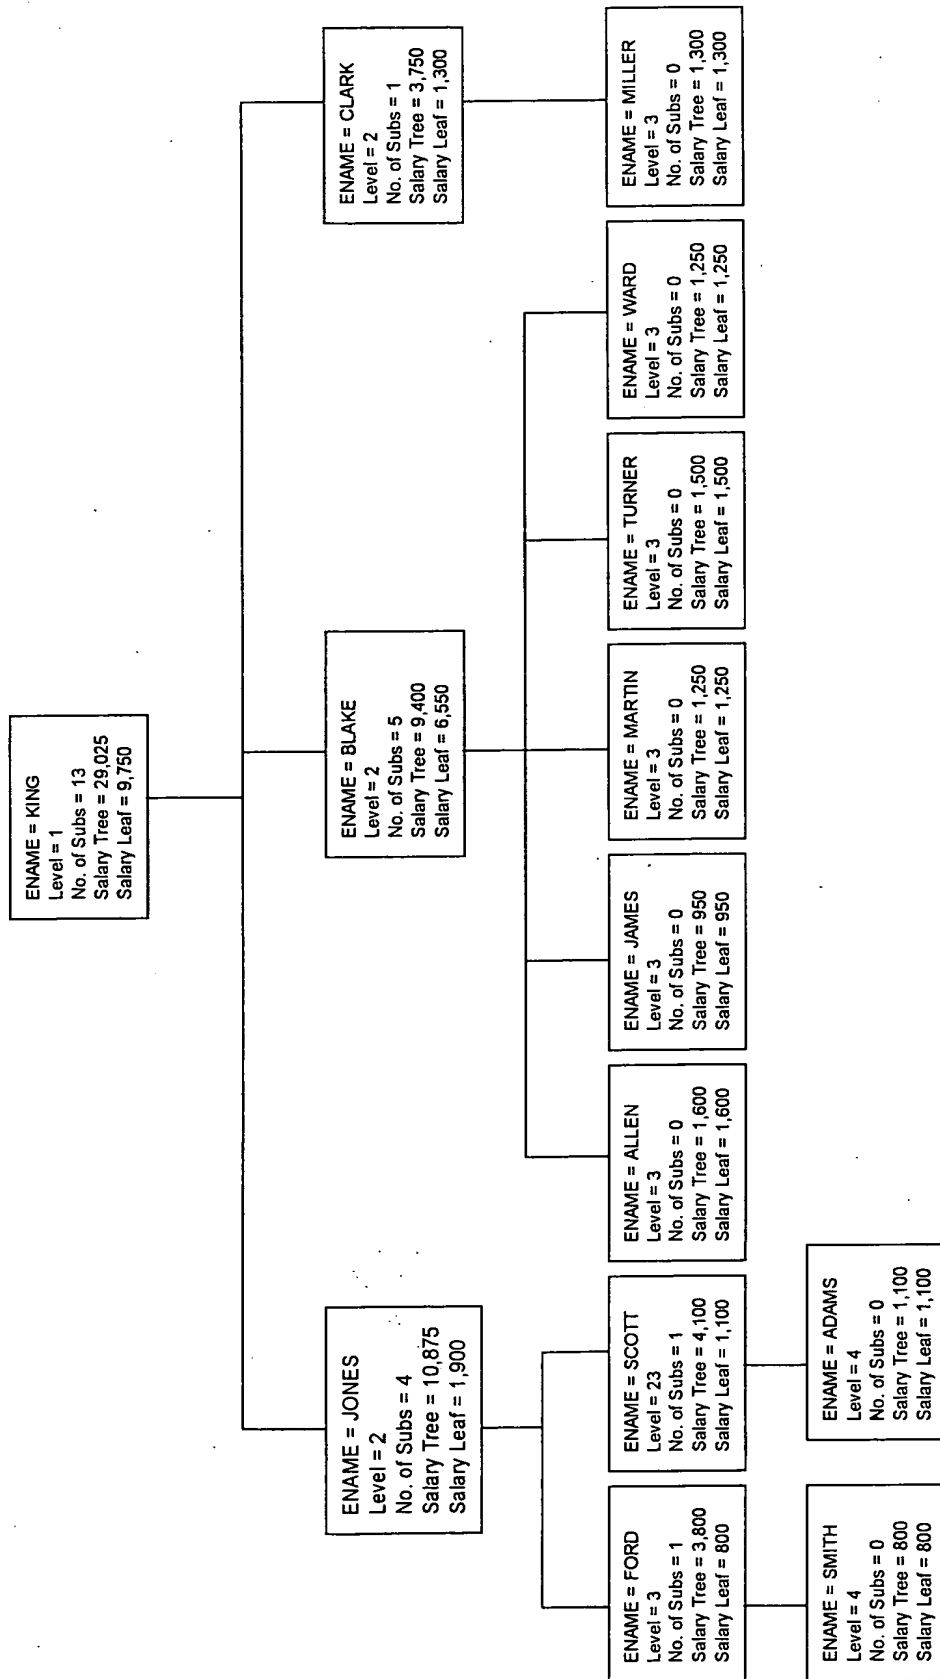


Figure 2

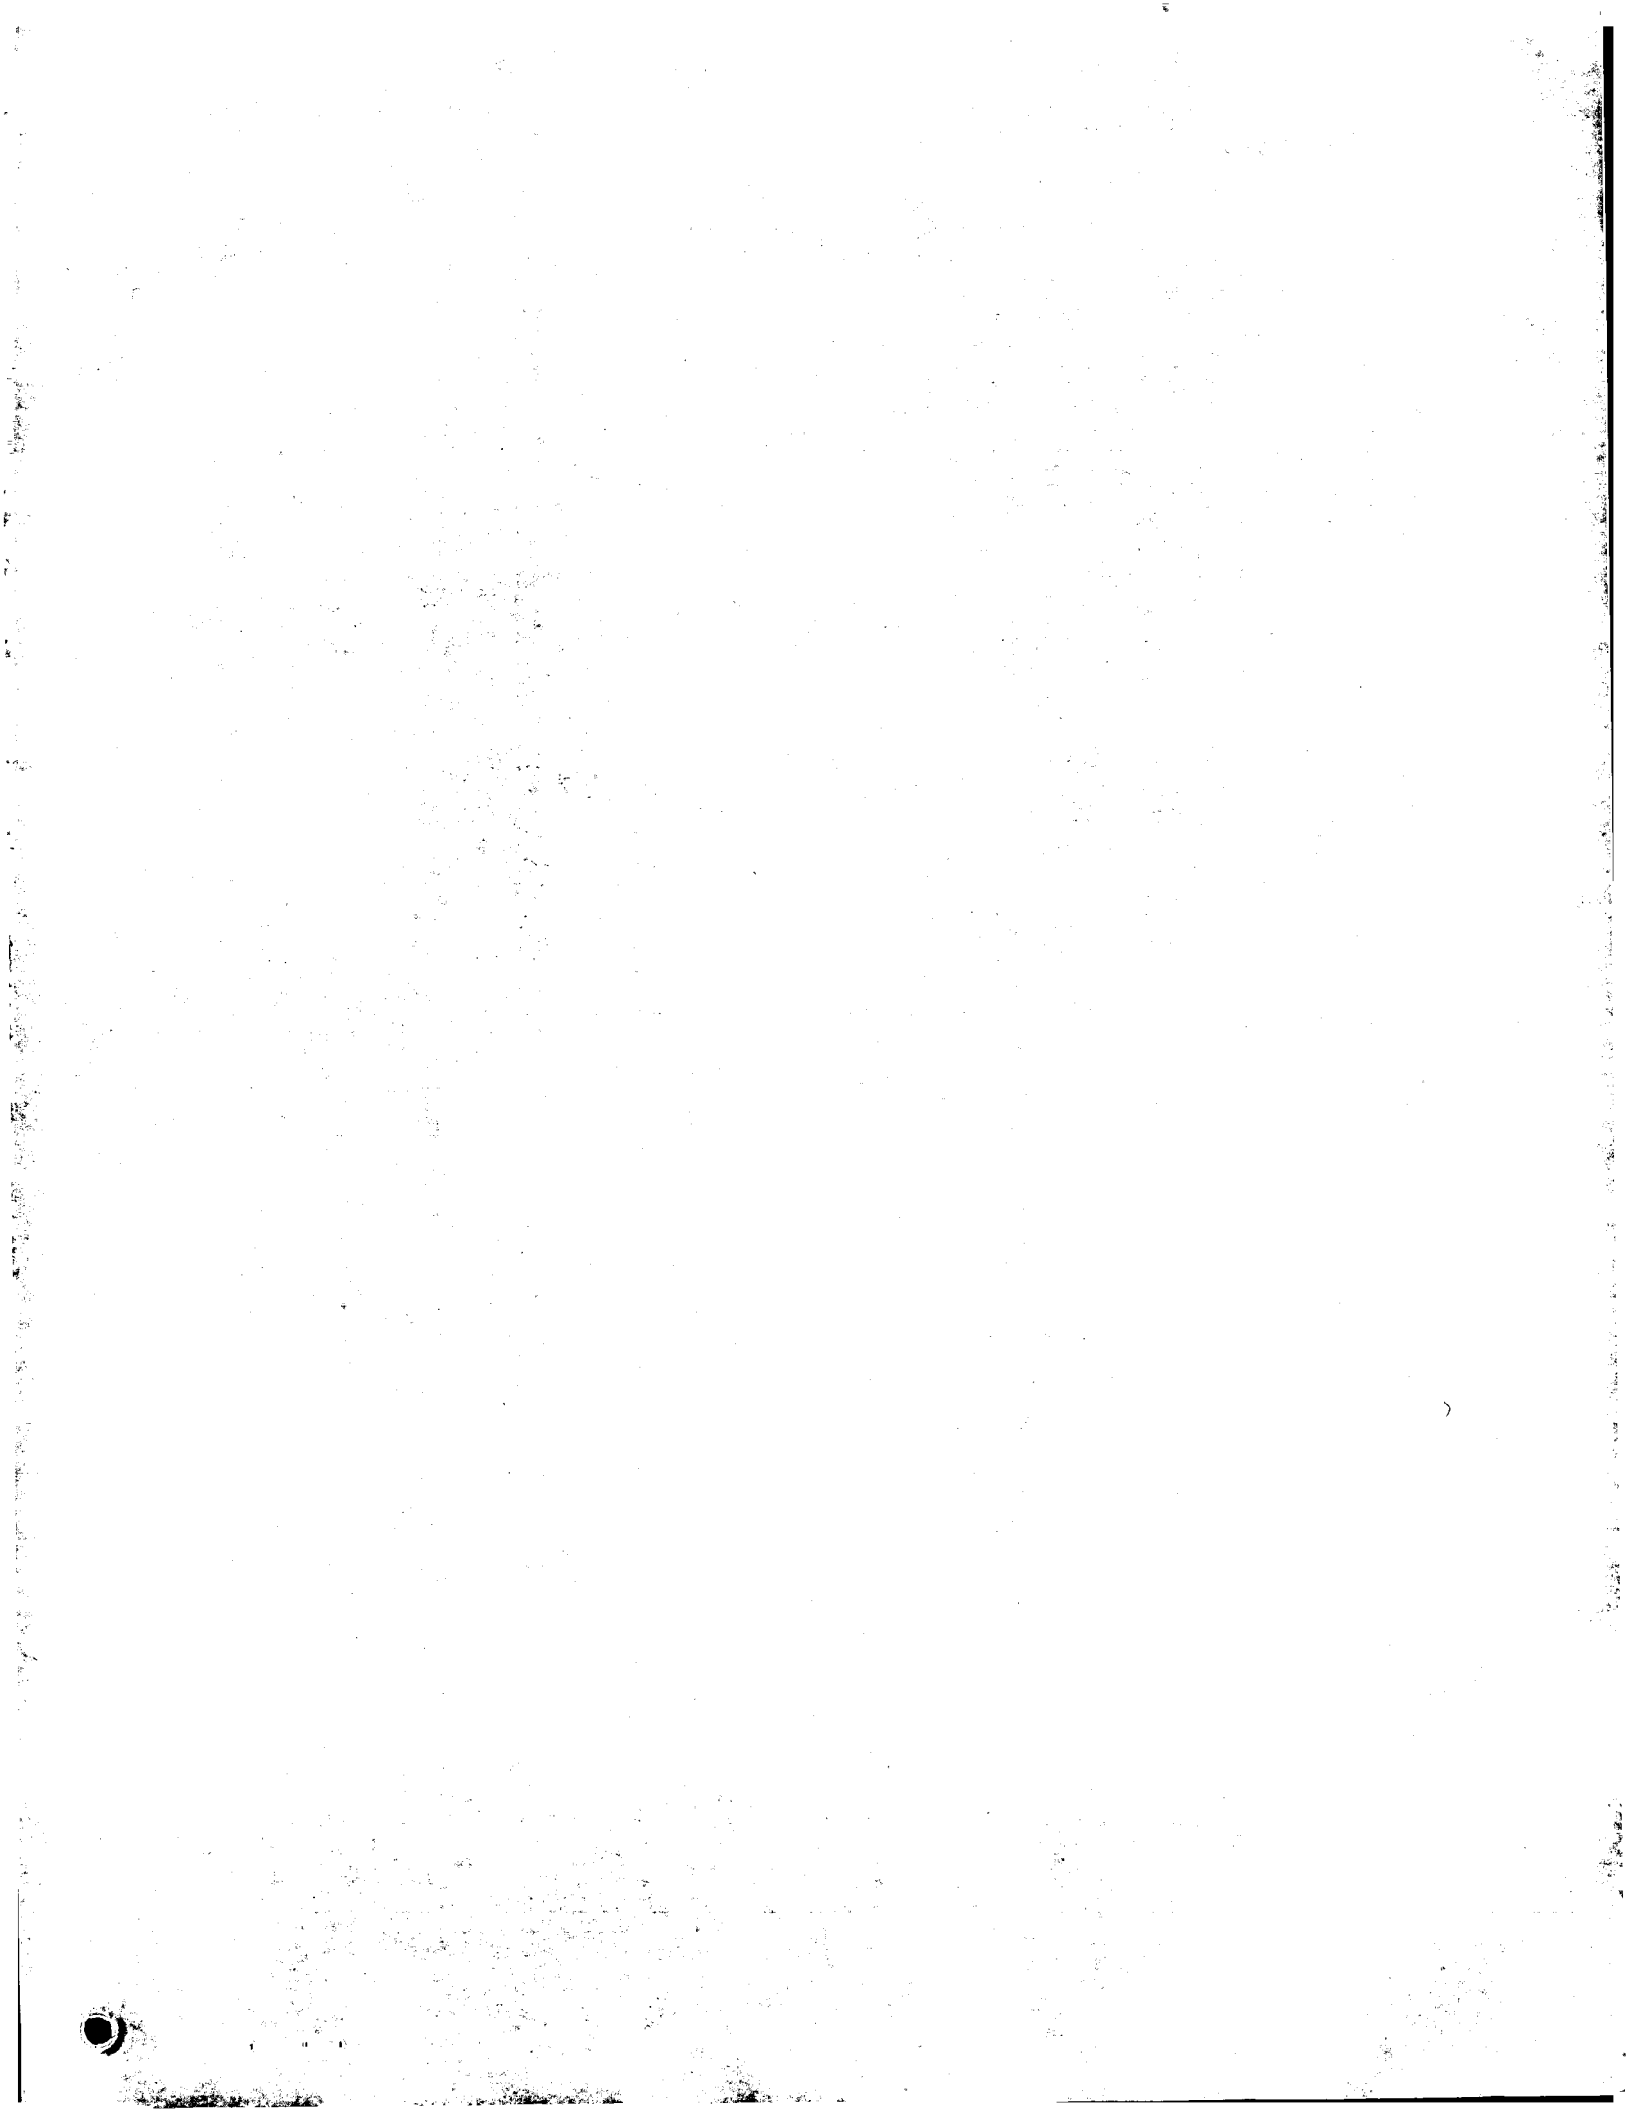

F

EMP
EMPNO
ENAME
JOB
MGR
HIRE DATE
SAL
COMM
DEPTNO

ORG
ORGNAME
MGR
EMPNO

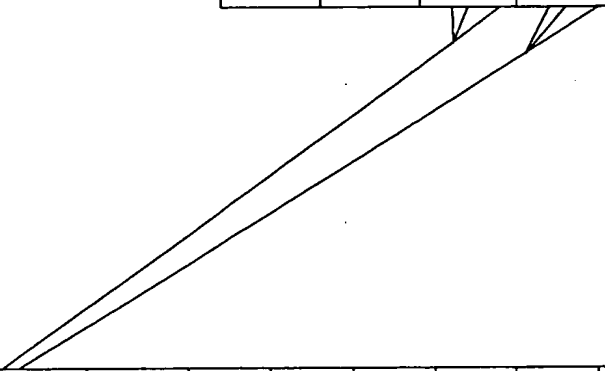



Figure 3






<b>ORGNAME</b>	<b>MGR</b>	<b>EMPNO</b>
Org A	7839	7566
Org A	7839	7782
Org A	7839	7698
Org A	7782	7934
Org A	7698	7499
Org A	7698	7521
Org A	7698	7900
Org A	7698	7654
Org A	7698	7844
Org A	7566	7788
Org A	7566	7902
Org A	7902	7369
Org A	7788	7876
Org X	0	7788
Org A	0	7839
Org X	7788	7839
Org X	7788	7782
Org X	7788	7698
Org X	7788	7566
Org X	7566	7900

Figure 4

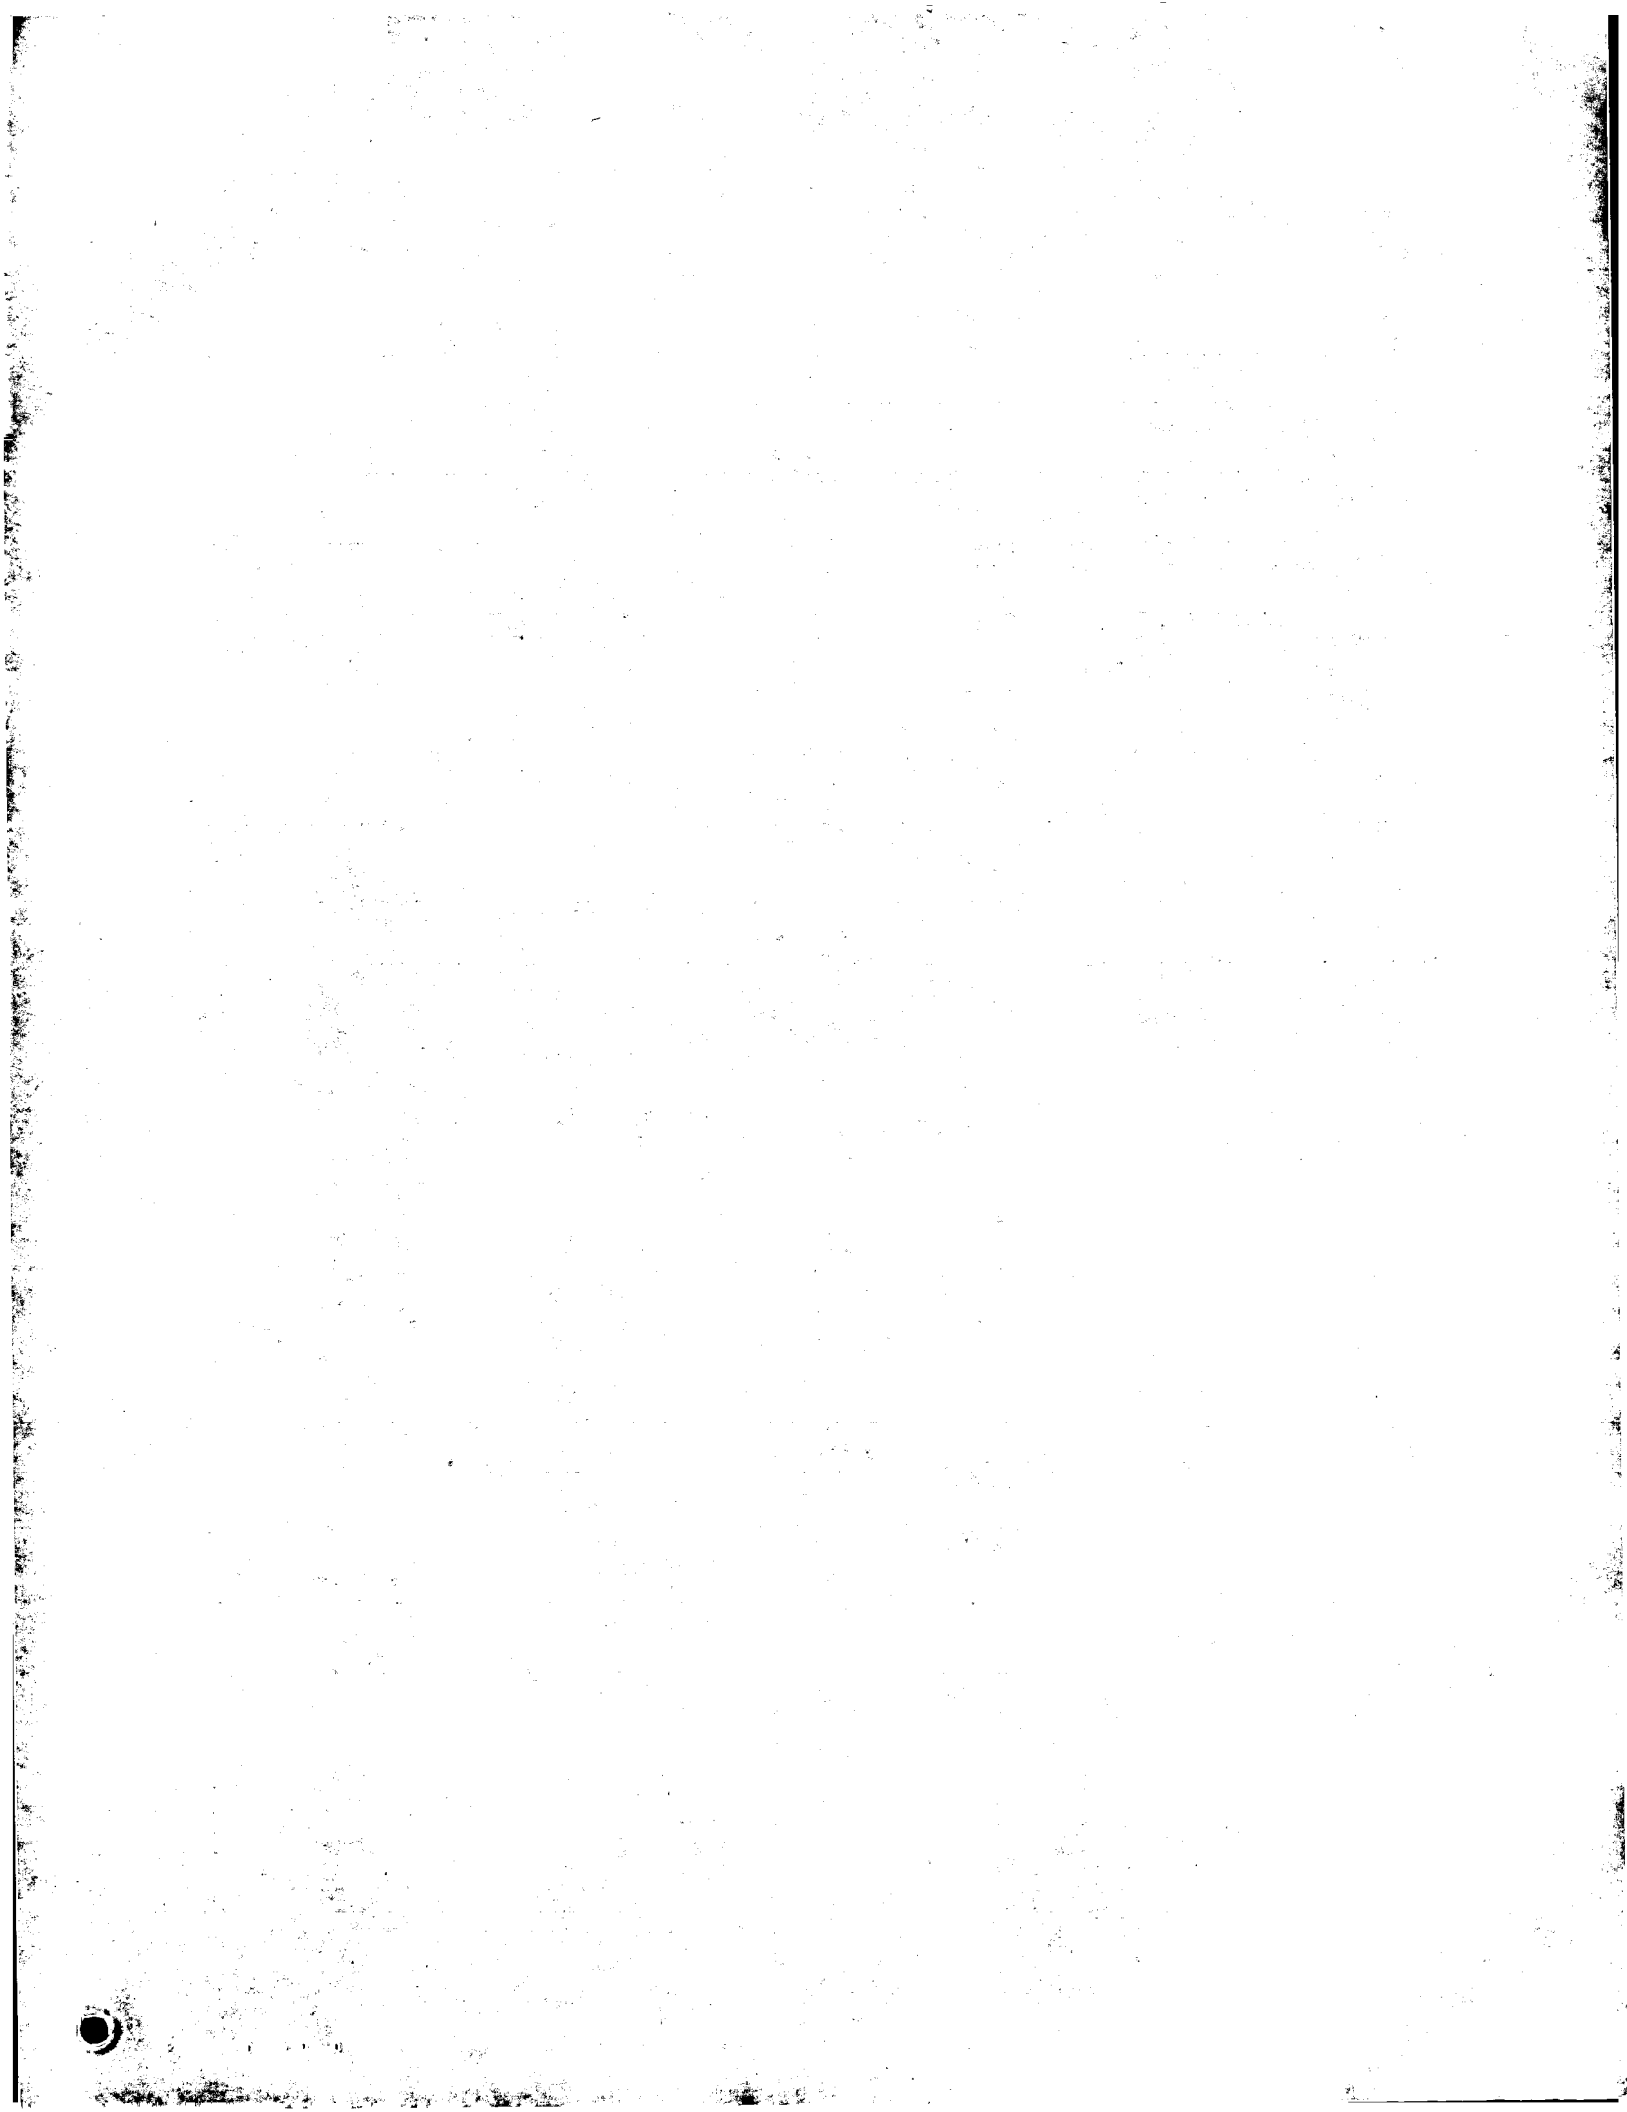

<b>ORGNAME</b>	<b>MGR</b>	<b>EMPNO</b>
Org X	7566	7654
Org X	7566	7521
Org X	7521	7934
Org X	7521	7844
Org X	7844	7499
Org X	7844	7902
Org X	7902	7369
Org X	7369	7876

Figure 4 cont

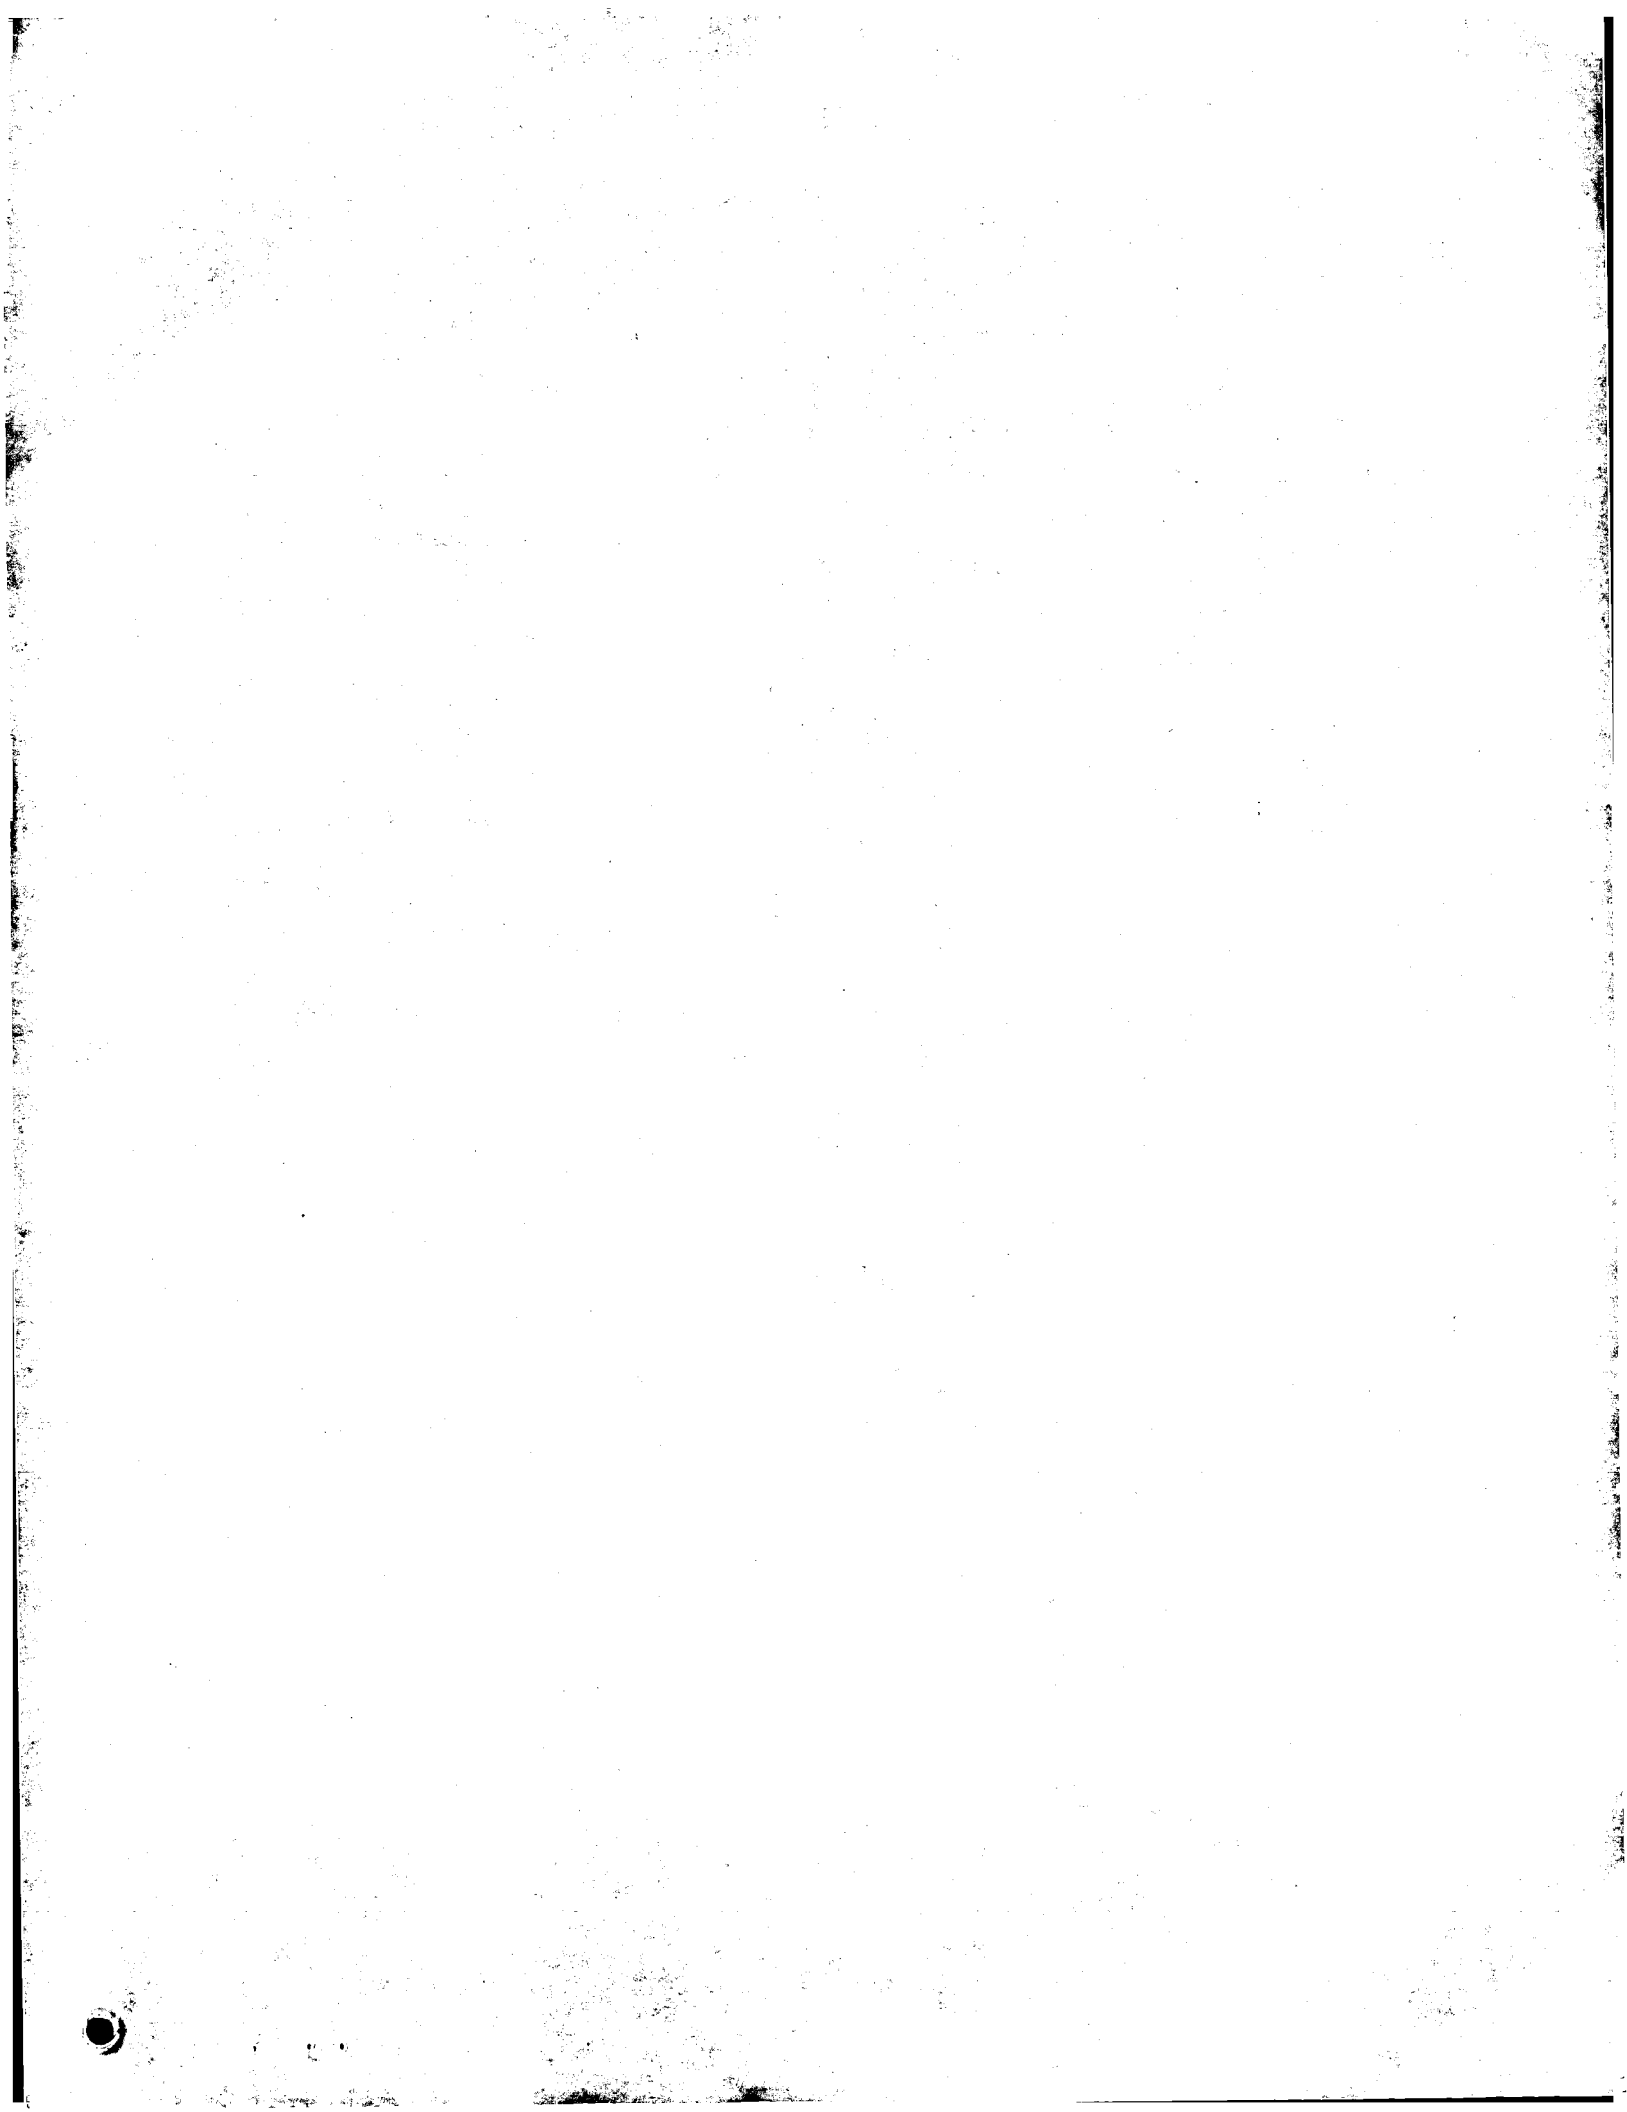

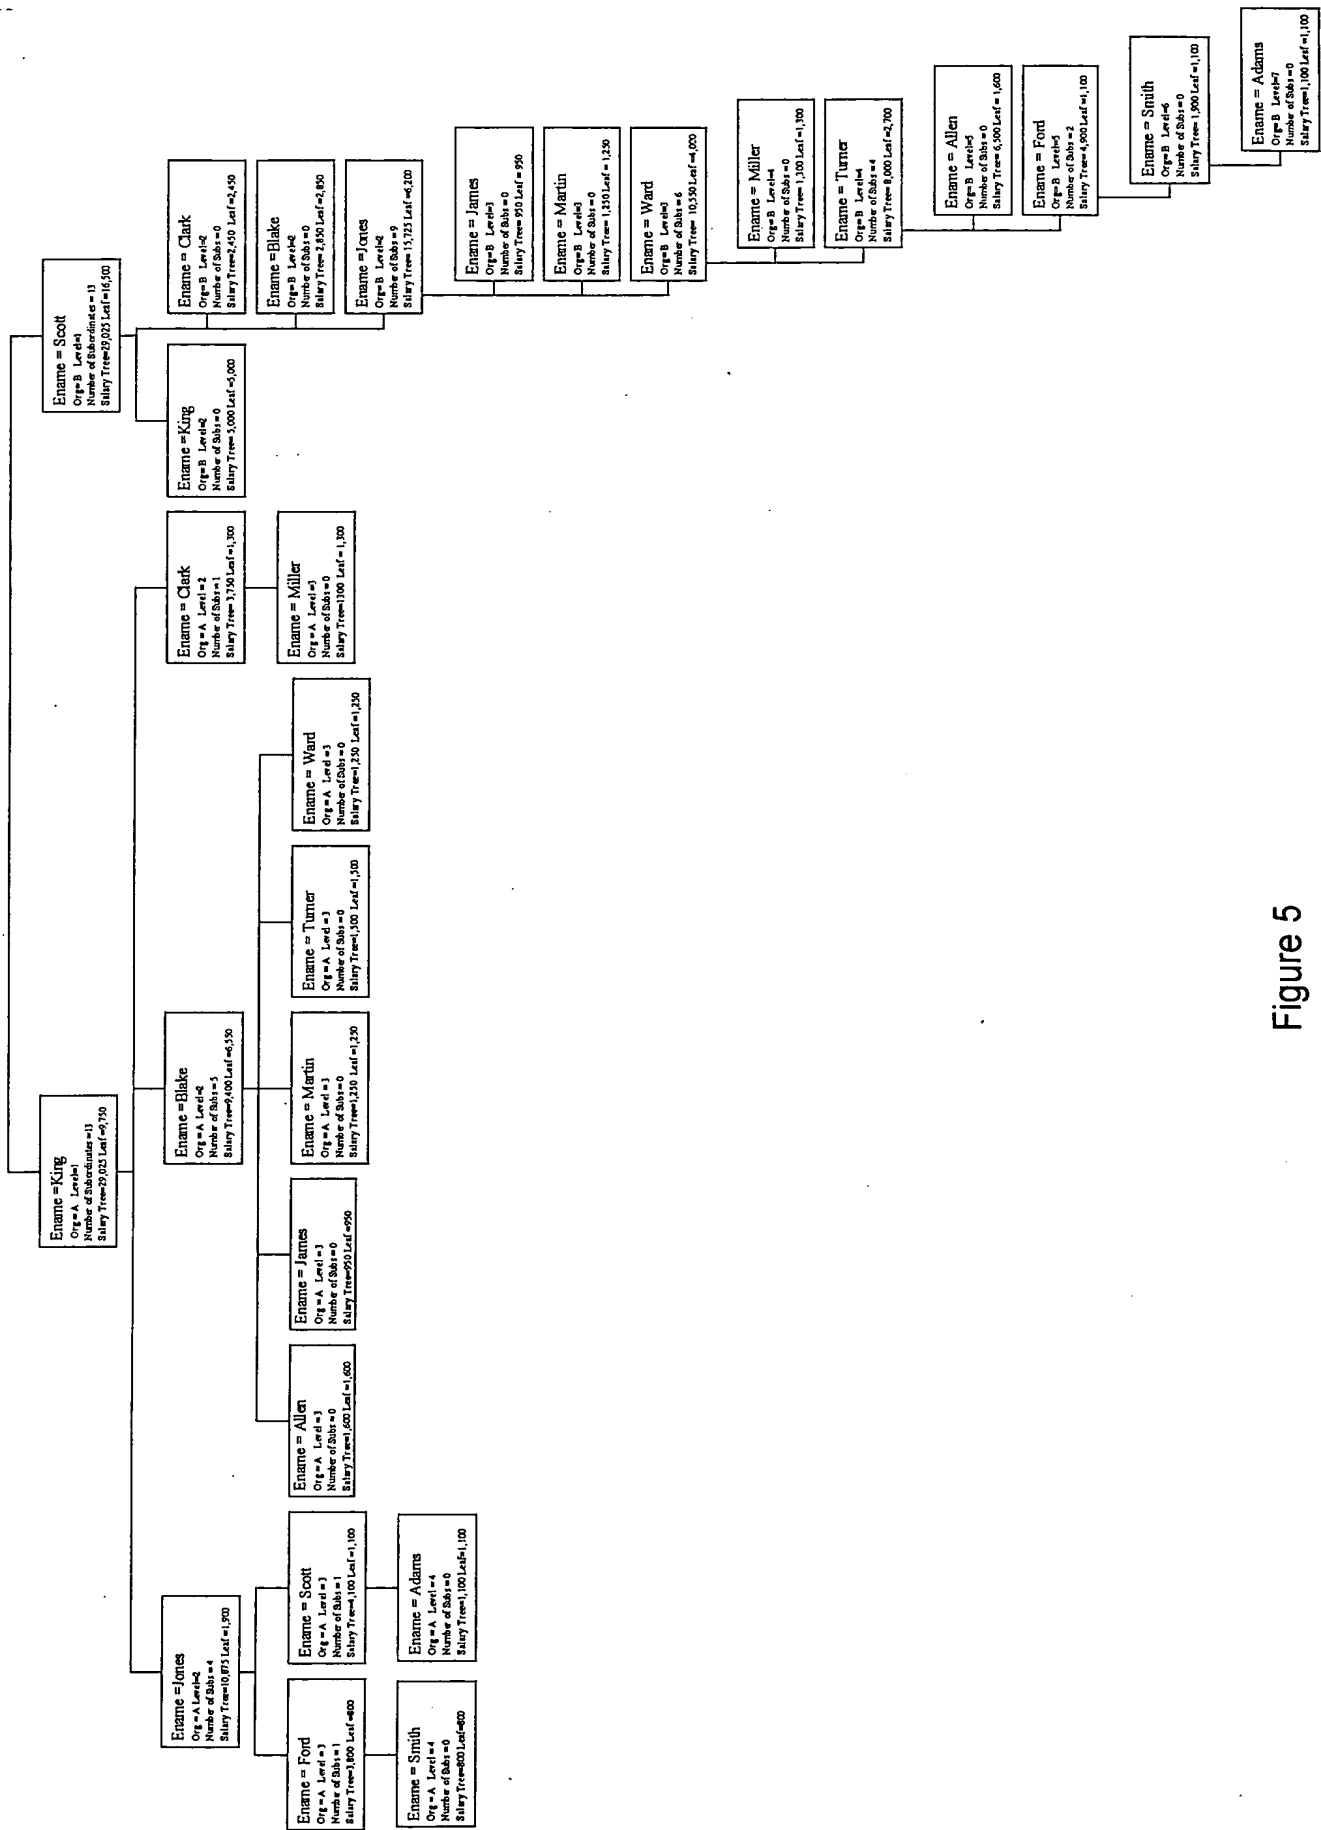
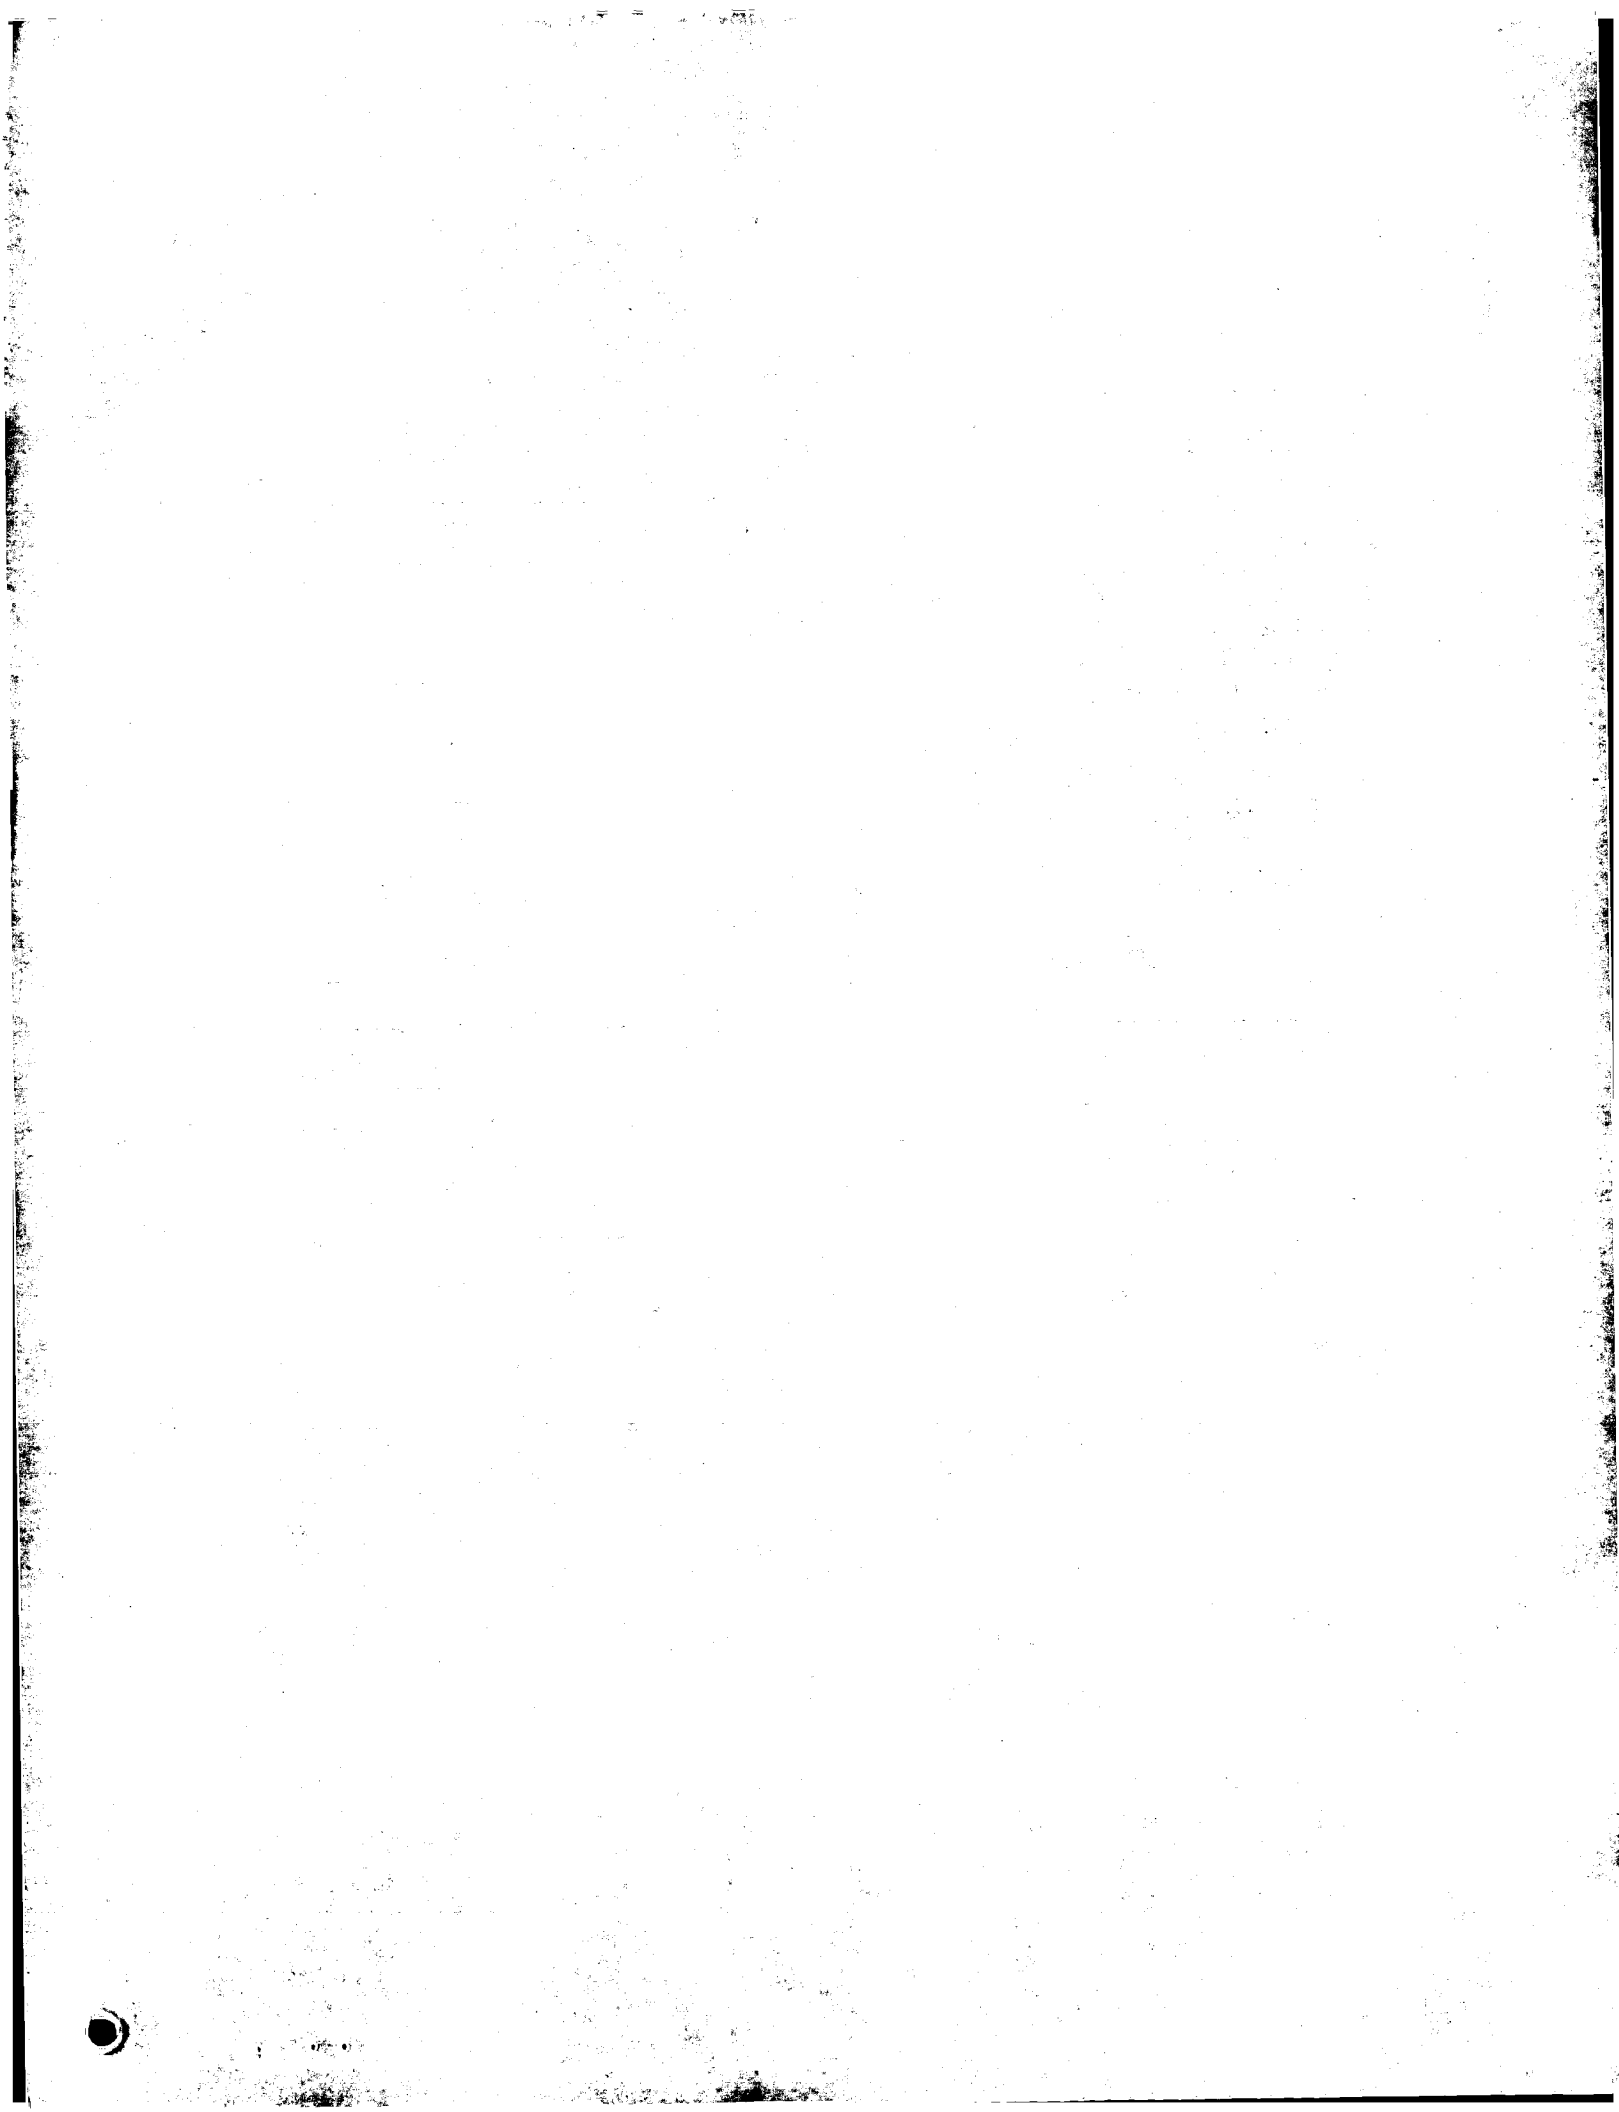


Figure 5



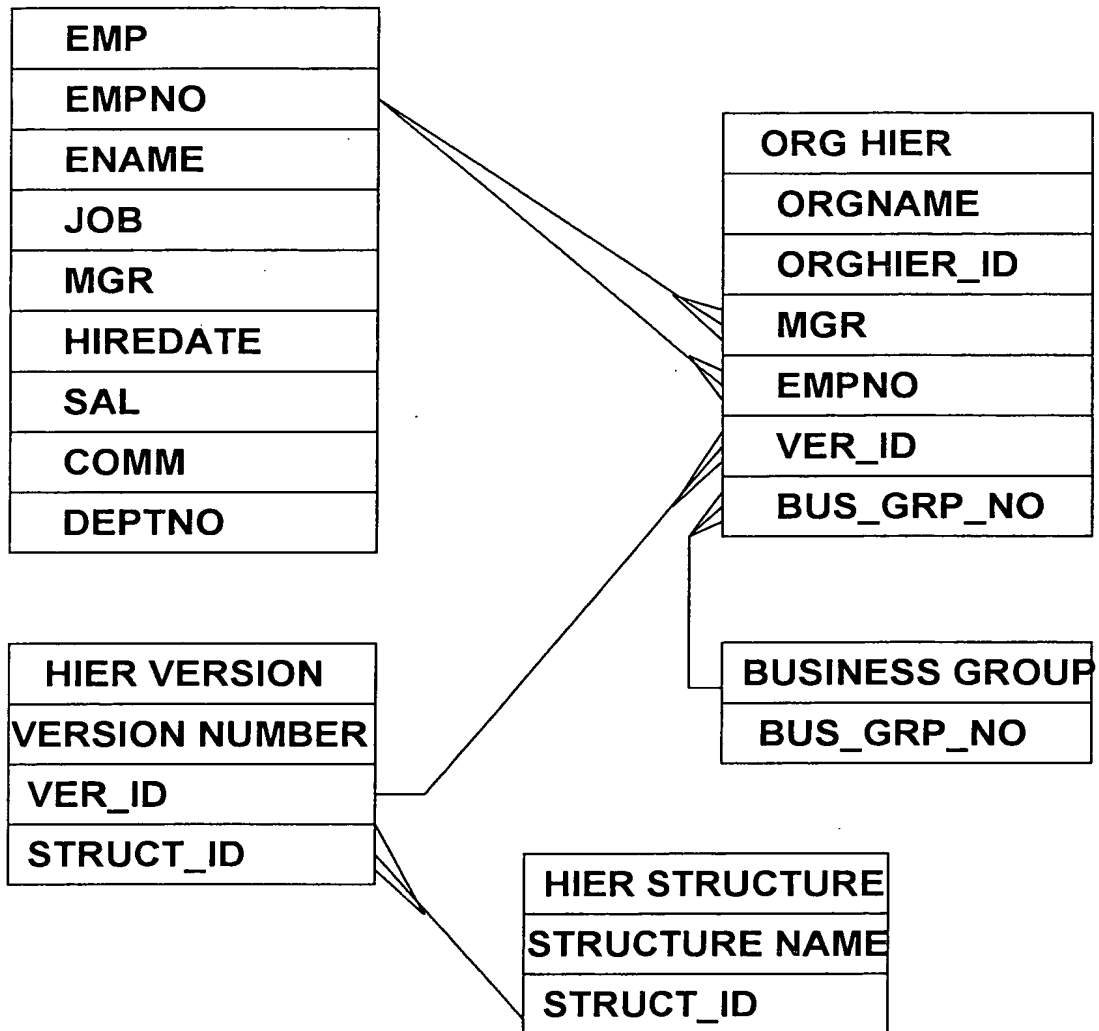


Figure 6

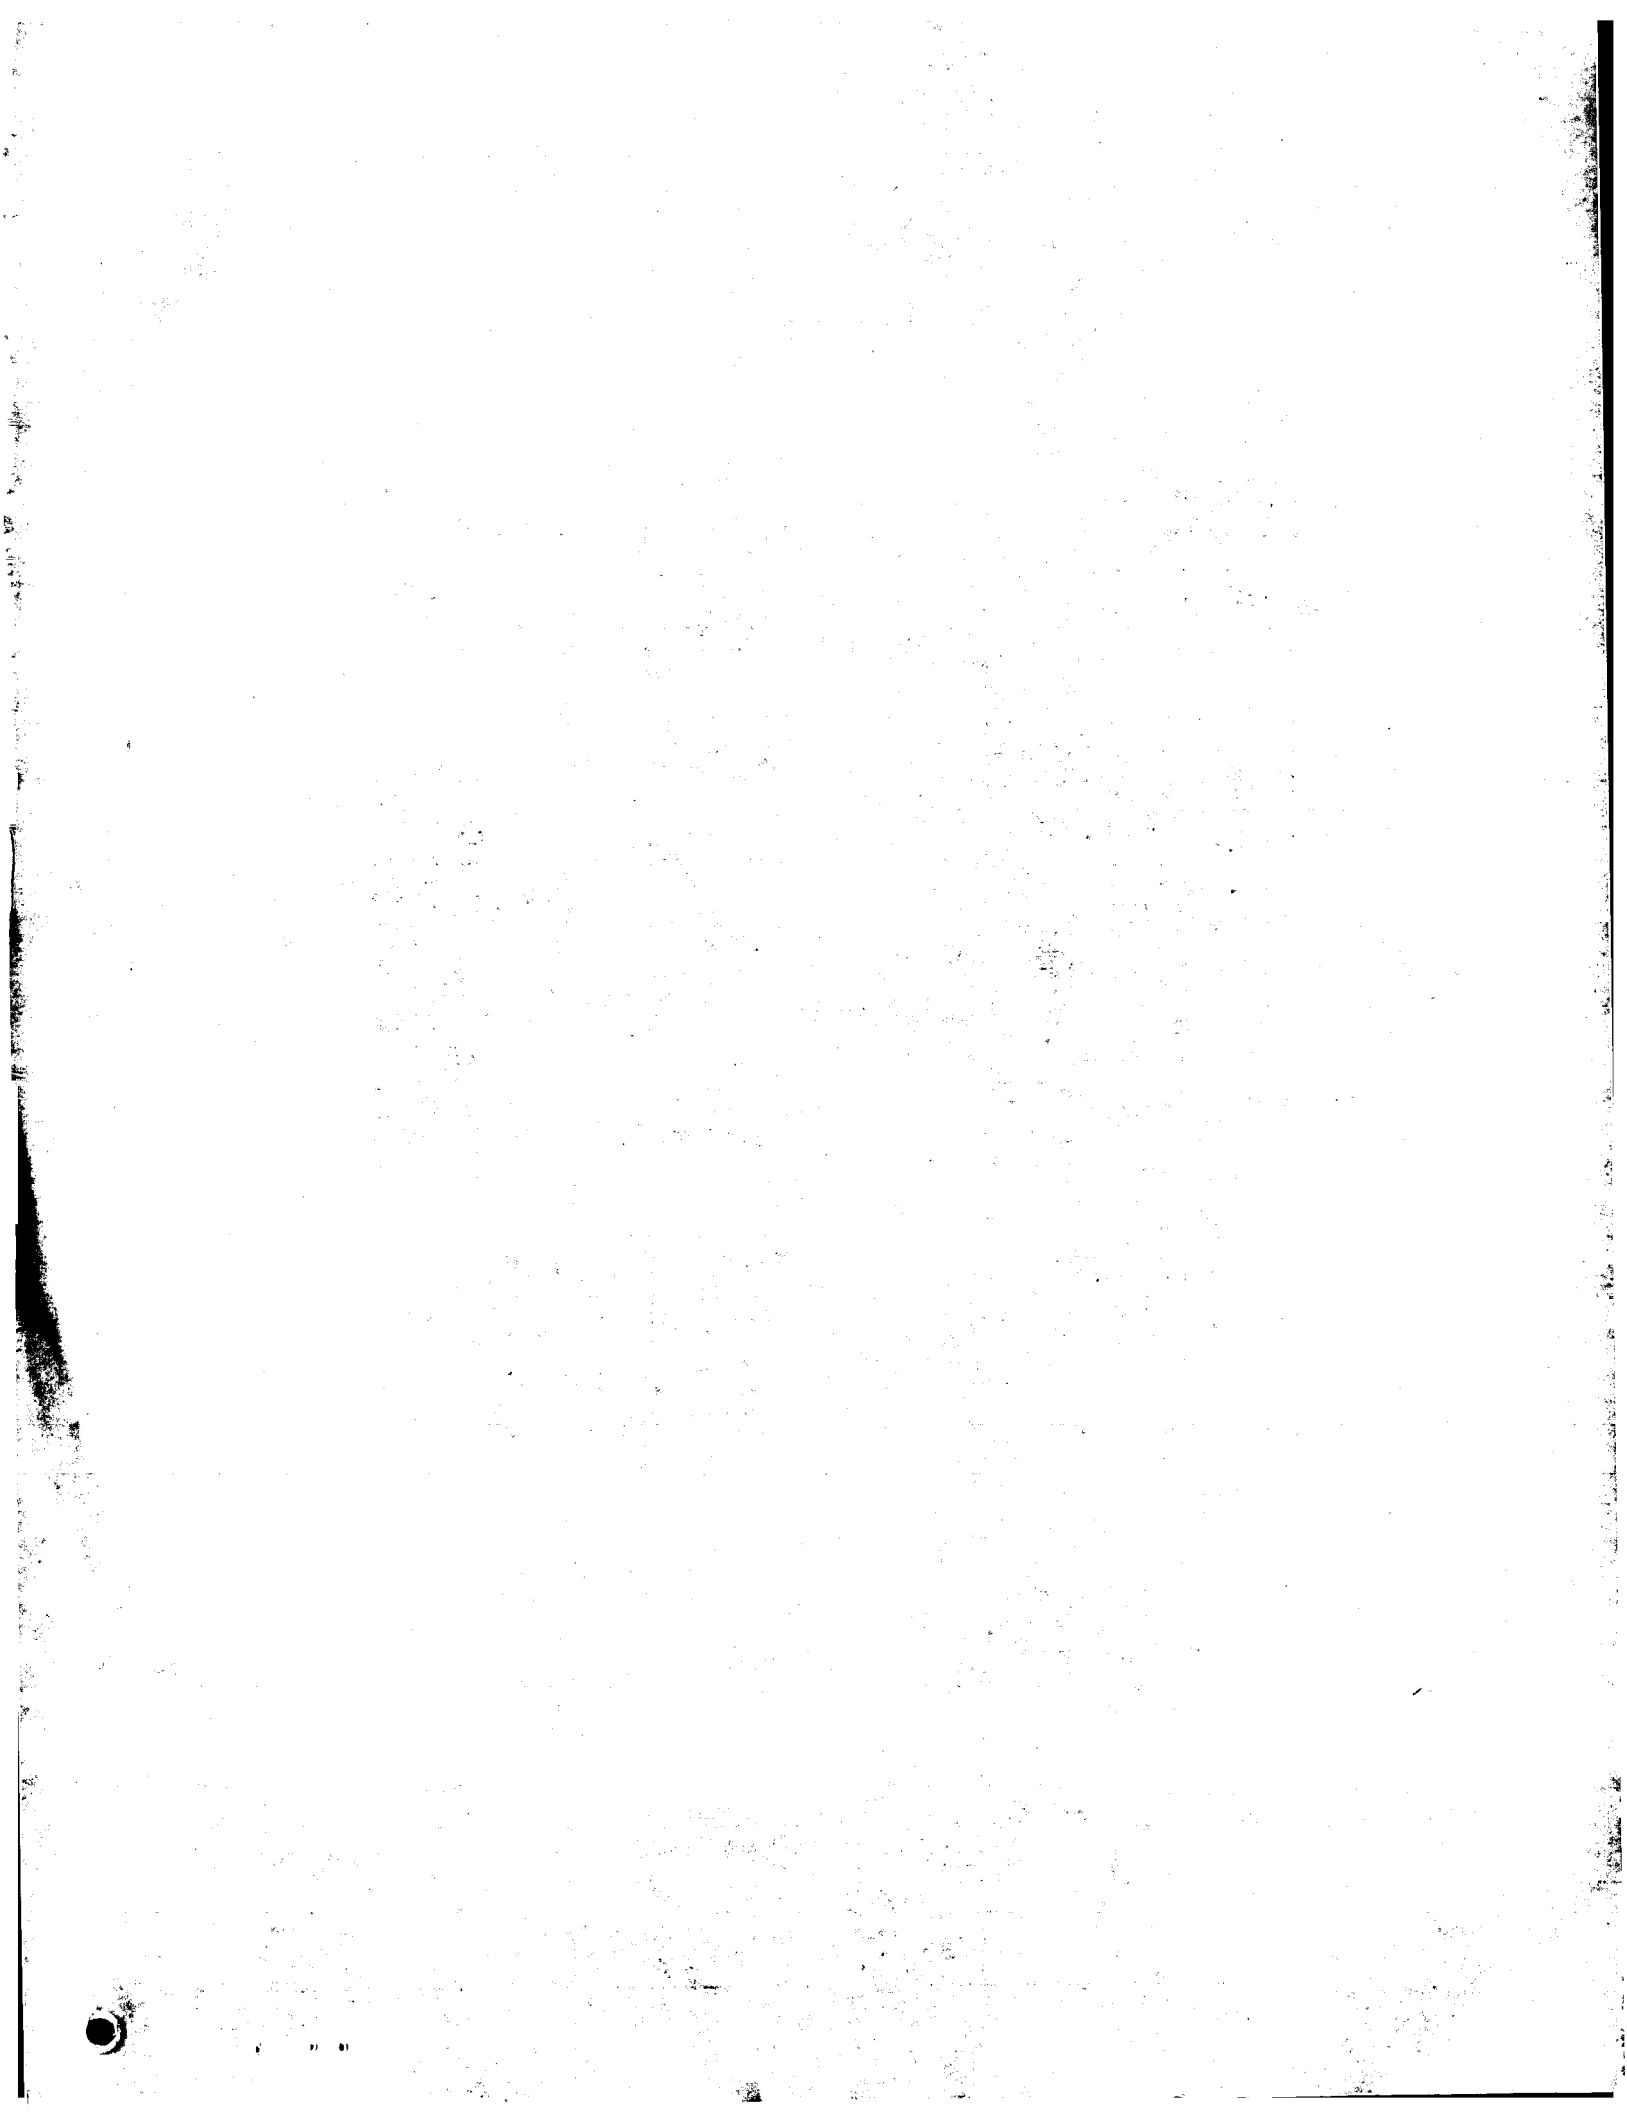
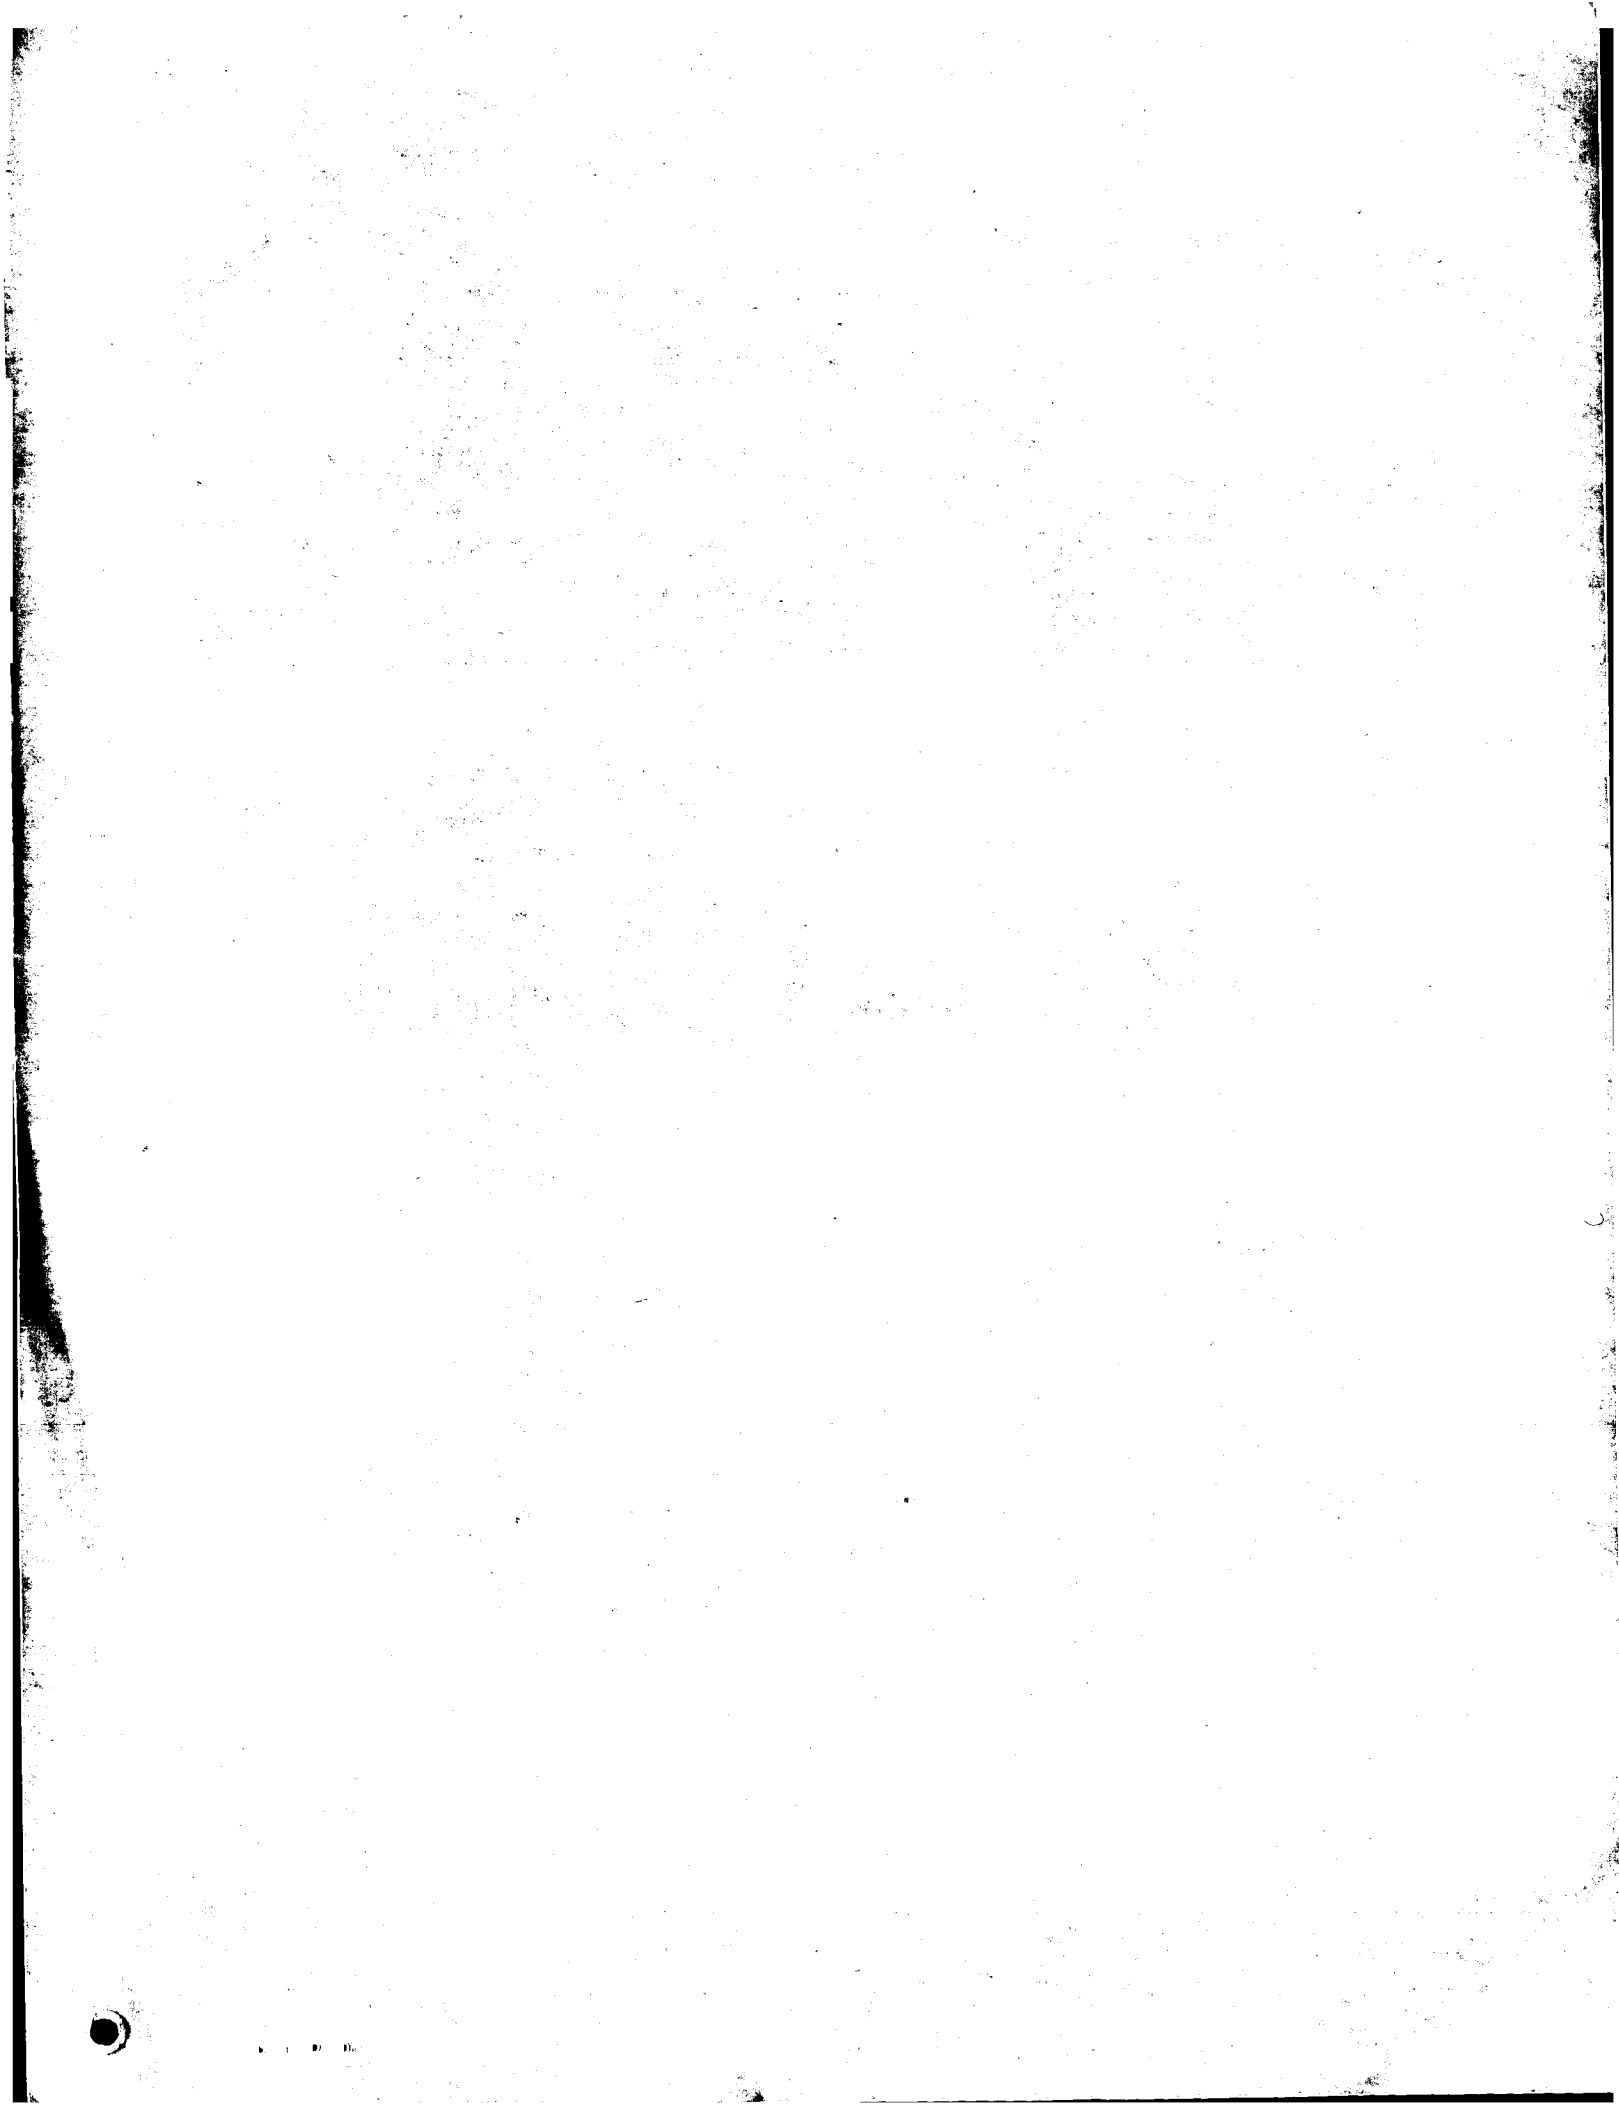




Figure 7

ORGNAME	ORGHIER_ID	MGR	EMPNO	VER_ID	BUS_GRP_NO
Org A	1	7839	7566	1	101
Org A	2	7839	7782	1	101
Org A	3	7839	7698	1	101
Org A	4	7782	7934	1	101
Org A	5	7698	7499	1	101
Org A	6	7698	7521	1	101
Org A	7	7698	7900	1	101
Org A	8	7698	7654	1	101
Org A	9	7698	7844	1	101
Org A	10	7566	7788	1	101
Org A	11	7566	7902	1	101
Org A	12	7902	7369	1	101
Org A	13	7788	7876	1	101
Org X	14	0	7788	1	101
Org A	15	0	7839	1	101
Org X	16	7788	7839	1	101
Org X	17	7788	7782	1	101
Org X	18	7788	7698	1	101
Org X	19	7788	7566	1	101
Org X	20	7566	7900	1	101
Org X	21	7566	7654	1	101
Org X	22	7566	7521	1	101
Org X	23	7521	7934	1	101
Org X	24	7521	7844	1	101
Org X	25	7844	7499	1	101
Org X	26	7844	7902	1	101
Org X	27	7902	7369	1	101
Org X	28	7369	7876	1	101
Org X	29	0	7788	2	101
Org X	30	7788	7839	2	101
Org X	31	7788	7782	2	101
Org X	32	7788	7698	2	101
Org X	33	7788	7566	2	101
Org X	34	7782	7900	2	101
Org X	35	7782	7654	2	101
Org X	36	7782	7521	2	101
Org X	37	7521	7934	2	101
Org X	38	7521	7844	2	101
Org X	39	7844	7499	2	101
Org X	40	7844	7902	2	101
Org X	41	7902	7369	2	101
Org X	42	7369	7876	2	101
Org A	43	0	7839	1	102
Org A	44	7566	7788	1	102



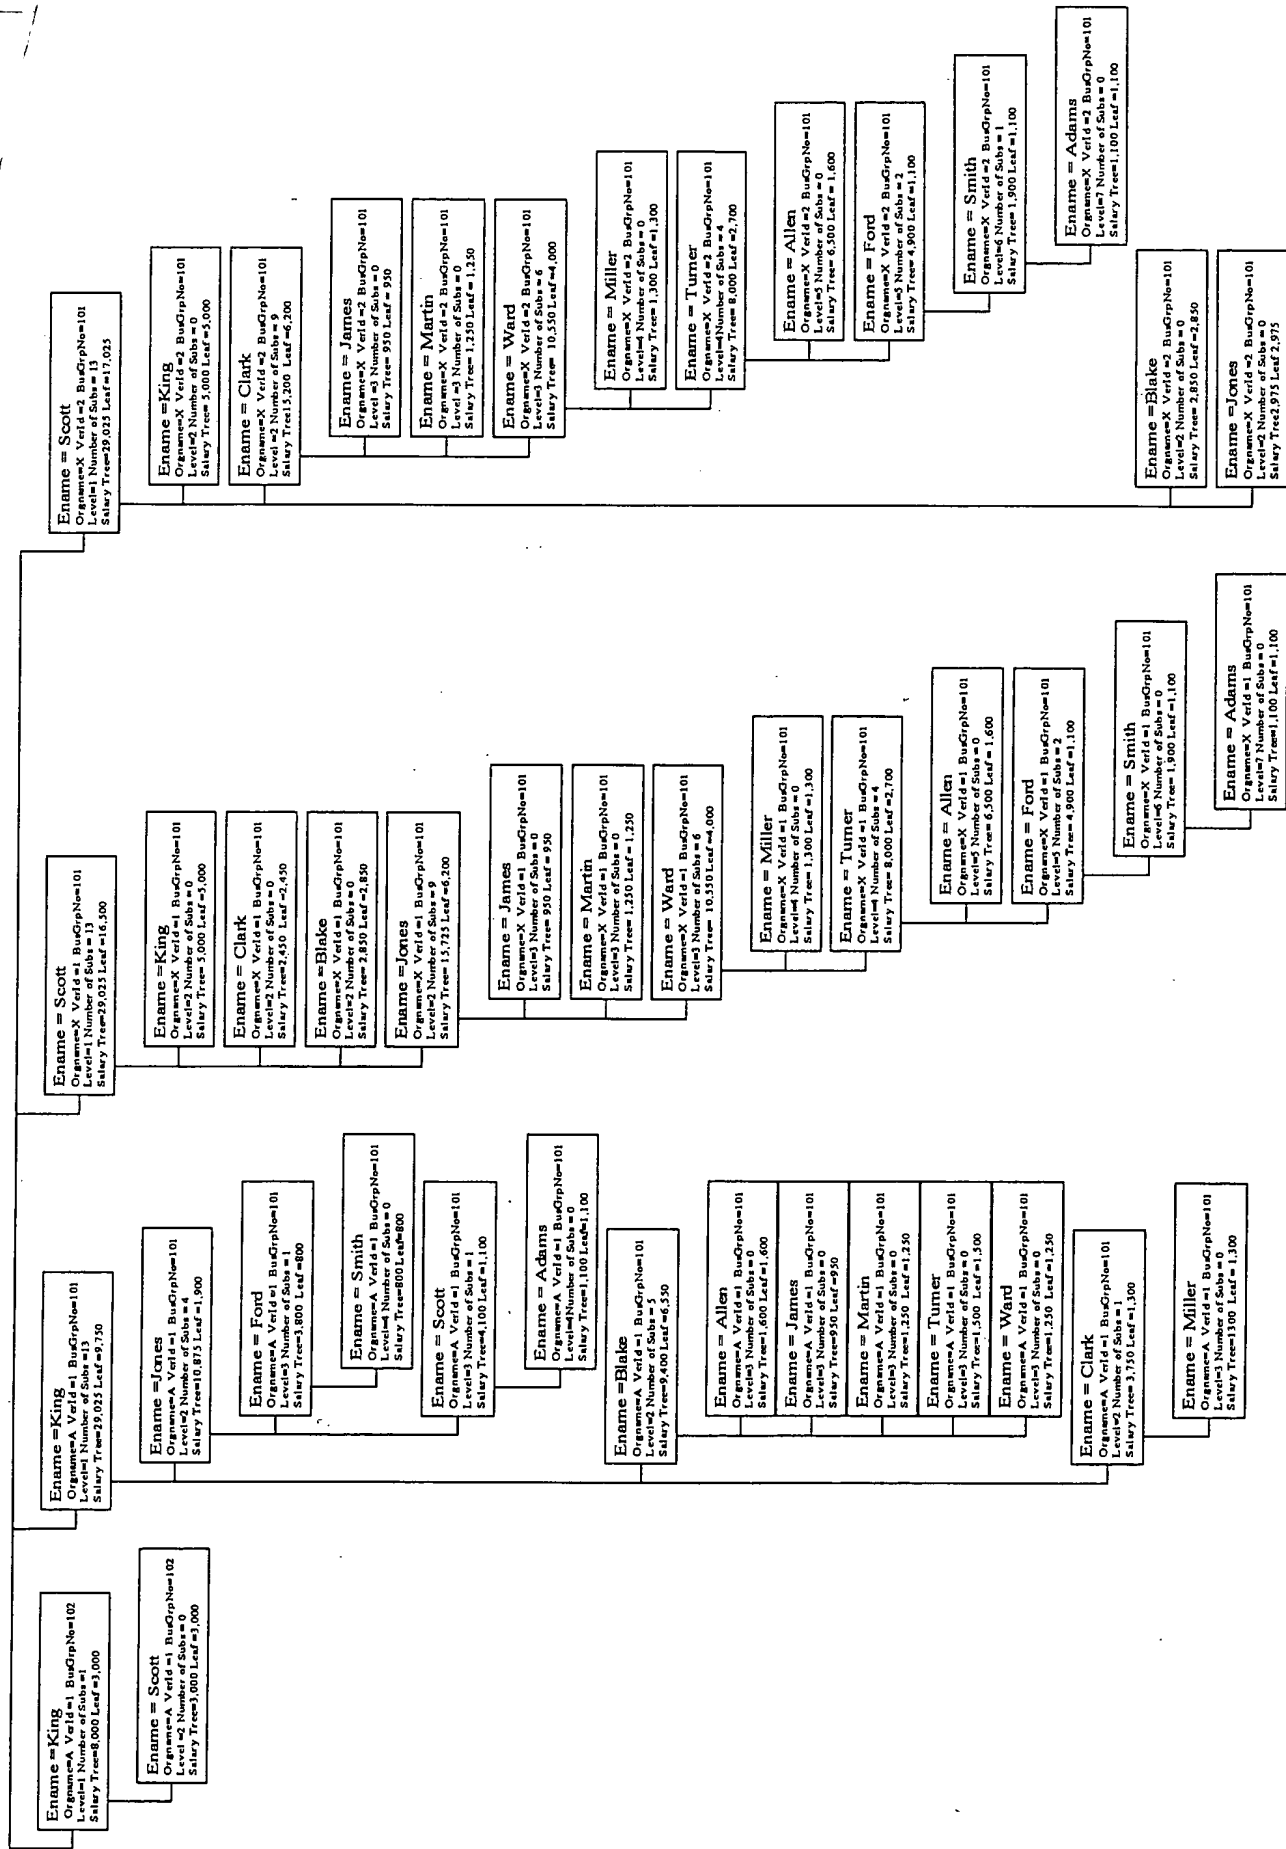


Figure 8

